

Electrical
Catalog
#30




YOUR GATEWAY TO GREAT PRODUCTS

877.805.2252
www.WESTGATEMFG.com

WESTGATE







WESTGATE MFG

Electrical Catalog
#30



WESTGATE

YOUR GATEWAY TO GREAT PRODUCTS

INTRODUCTION

When you choose a manufacturer to fulfill your electrical and lighting needs, you generally make your decision based on quality, price and service. Our vision at Westgate Manufacturing was to provide the best quality product at the most competitive price, delivered with the most professional service in the industry.

Westgate Manufacturing offers 16 distinct lines of electrical and lighting products that deliver the highest level of quality and performance in the industry. We ship all orders received by noon that same day from our central warehouse facility located in the City of Commerce (Los Angeles) and all of our product is backed by our Westgate warranty. From weatherproof junction boxes to state-of-the-art LED lighting fixtures we're sure you will be satisfied with our Westgate quality, price and service.

In just seven short years, Westgate has grown from a fledgling manufacturer to an industry leader in the development and production of cutting-edge electrical and lighting products. We are confident that you will find the quality and selection of our products among the best in the business.

Please let the professional staff at Westgate Manufacturing provide you with the best quality products and services available. We are dedicated to improving your profitability and service levels, while reducing shipper errors, defectives and back orders. Please give us the opportunity to serve you.

Move up to Westgate Manufacturing.

E. Hadjyan
President



THE WESTGATE ADVANTAGE



PRODUCT RELIABILITY

Our products are sourced from factories who build value in their products and services. WESTGATE supply chain management specialists and engineering teams forge relationships with our vendor partners to provide high-caliber, sellable products that meet total customer satisfaction. WESTGATE is dedicated to quality, accuracy and fine craftsmanship at each and every point of production. We strive for perfection, set the standards and take an extra step in each production to provide quality that is definitely world-class.



PROFIT

Profit is the critical life blood of every business enterprise. Understanding our customers' requirements and disciplined distribution practices, we ensure that all of our business partners have exceptional profit opportunities. WESTGATE builds long term and mutually beneficial relationship with its customers by repaying their trust and investment with continuous earnings and growth in their business.



CUSTOMER CARE

Customer satisfaction is our goal. We work with our customers in a close relationship to understand their requirements and to provide them with the personal attention and care that their businesses need. WESTGATE empowers its core group to provide excellent service exceeding far beyond your expectations.



CONVENIENCE

WESTGATE is the one-stop shop for electrical and lighting requirements. We supply the needs and meet the demands of the market and our clientele with products at competitive prices. We choose convenience without compromising quality so our customers get maximum benefits. Product availability, on-time delivery, order tracking, no minimum order requirement, low freight policies, integral sales people and responsive sales managers are all hallmarks of the WESTGATE business experience.



INTEGRITY

WESTGATE endeavors to build a business environment that values integrity and passion for excellence. We take pride in our brands and the quality of our service. Our confidence and our success reflect the quality of our products and integrity of our work.

Doing business with WESTGATE can be one of the most rewarding partnerships in your business. Take the next step with us and open the gate of opportunities to your perfect business.





A1-A19

- Weatherproof Boxes
- Device Covers
- Extension Boxes & Rings
- Photo Electric Controls
- Lampholders & Gaskets
- Accessories

B1-B6

- LB Series
- LL Series
- LR Series
- C Series
- T Series
- SLB Series

C1-C36

- EMT Fittings
- BX-Flex
- Liquid Tight
- Non-metallic Cable
- Ground Fittings
- Pull Elbows
- Straps
- Nipples
- Fish Tapes

D1-D24

- Motion Sensors
- Dimmers
- Timers
- Switches
- Receptacles
- Combination Devices
- Wallplates
- Lampholders
- Tiger Grip

E1-E8

- Range Cords
- Dryer Cords
- Power Cords
- Extension Cords
- Adaptor Cord Sets

F1-F4

- Single Interface
- Modular Interface
- Service Enclosures

G1-G5

- CAT5
- CAT6
- RG59/U
- RG6/U
- Low Voltage Wire

contents

page

WEATHERPROOF PRODUCTS

10-31

CODUIT BODIES

32-39

ELECTRICAL FITTINGS

40-77

WIRING DEVICES

78-103

CORDS

104-113

COMMUNICATION ENCLOSURES

114-119

WIRE & CABLE

120-127

Picture index

WEATHERPROOF PRODUCTS

1-GANG STANDARD BOXES



1-GANG DEEP BOXES



2-GANG STANDARD BOXES



2-GANG DEEP BOXES



3-GANG DEEP BOX



1-GANG FLANGED EXTENSION BOXES



2-GANG EXTENSION BOXES



EXTENSION RINGS



ROUND EXTENSION BOXES



ROUND COVERS



RECTANGULAR COVERS




1-GANG DEVICE COVERS




2-GANG DEVICE COVERS




3-GANG DEVICE COVERS



IN-USE WEATHERPOOF COVERS



LAMPHOLDER COMBO



CONDUIT BODIES

PHOTOELECTRIC CONTROLS



LB SERIES



LL SERIES



LR SERIES



ELECTRICAL FITTINGS

C SERIES



37

T SERIES



38

SLB SERIES



39

EMT FITTINGS



42



42



43



43



44



44



45



45



46



46



47



47



48



48



49



49



49



50



50

BX-FLEX



51



51



52



52



52



53



54



54



55



55



56

WATER-TIGHT HUB

LIQUID-TIGHT

NON-METALLIC CABLE



56



57



57



57



58



58



59




59



60



60



61

PULL ELBOWS

RIGID-IMC CONDUIT



61



62



62



63



63



64



64



64



65



65



65

GROUND FITTINGS



66



66



66



67



67



68



68



69



69



70



70

STRAPS



70



71



71



72



72



73



74



74



74



74



75

CONDUIT NIPPLES


SERVICE ENTRANCE

HANGING DEVICES

Picture index

WIRING DEVICES

BOX ACCESSORIES



75

75

76

77

77

AUTOMATIC MOTION SENSORS



80

80

80

80

81

81

TIMERS



81

81

81

82

82

83

83

DIMMERS




84

84

84

84

SWITCHES



85

85

85

86

86

86

86

87

87

87

87

RECEPTACLES



87

88

88

88

88

89

89

89

89

89

90

COMBINATION DEVICES



90

90

90

91

91

91

91


92

92

92

93


DECORATIVE SCREWLESS WALLPLATES



93


93

PLASTIC WALLPLATES



94

95



95

97

STAINLESS STEEL WALLPLATES

PLASTIC WALLPLATES



98

99



99



100



101

102

102

102

102

LAMP HOLDERS



102

103

103

CORDS

TIGER GRIP



106

106

107

107

DRYER CORDS



108

RANGE CORDS



109

110

POWER CORDS



111

112

OUTDOOR
EXTENSION CORDS



112

113

COMMUNICATION ENCLOSURES

WIRE & CABLE

ADAPTOR CORD SETS



113

116

117

118

119

SINGLE INTERFACE



122

MODULAR



122

SERVICE



122

CAT5 ENHANCED UTP CABLE




122



123

123

CAT6 UTP CABLE




124

124

124

124

COAXIAL CABLE (RG6)



125

125

126

COAXIAL CABLE (RG59)



126



126

LANDSCAPE
LIGHTING WIRE



126

weatherproof boxes



gaskets

device covers

&

extension



boxes & rings

photo electric



controls



accessories

lampholders

weatherproof products

Westgate's weatherproof products are UL listed and manufactured from high quality "copper free" aluminum alloy and are suitable for both exterior and interior applications. We offer a broad range of weatherproof boxes, extension rings, covers and devices to meet every contractor's outdoor needs.

A1



TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 2-3/4", height 4-1/2", depth 2"
- :: Material: die-cast aluminum with powder-coated finish
- :: Available with 3, 4, or 5 reinforced threaded outlet holes
- :: Outlet hole sizes: available in 1/2" or 3/4" threaded outlet holes
- :: Color: gray (select items available in white*)

PRODUCT FEATURES:

- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Reinforced connector outlets that accept threaded fittings & conduits
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included*
- :: "X" denotes boxes with side outlets

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices

Ref: UL File#: **E 2 0 4 2 5 9**


Also available in white

W1B50-3
W1B75-3

W1B50-4
W1B75-4

W1B50-5
W1B75-5

W1B50-5X
W1B75-5X

ONE-GANG BOXES | 2" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W1B50-3	1/2"	3	18.3	GRAY	40
W1B50-3-WH*	1/2"	3	18.3	WHITE	40
W1B75-3	3/4"	3	18.3	GRAY	40
W1B75-3-WH*	3/4"	3	18.3	WHITE	40
W1B50-4	1/2"	4	18.3	GRAY	40
W1B75-4	3/4"	4	18.3	GRAY	40
W1B50-5	1/2"	5	18.3	GRAY	40
W1B50-5-WH*	1/2"	5	18.3	WHITE	40
W1B75-5	3/4"	5	18.3	GRAY	40
W1B75-5-WH*	3/4"	5	18.3	WHITE	40
W1B50-5X	1/2"	5	18.3	GRAY	40
W1B75-5X	3/4"	5	18.3	GRAY	40

*Available in white on selected items





TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 2-3/4", height 4-1/2", depth 2-5/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Available with 3, 4, or 5 reinforced threaded outlet holes
- :: Outlet hole sizes: available in 1/2", 3/4" or 1" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Reinforced connector outlets that accept threaded fittings & conduits
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included
- :: "X" denotes boxes with side outlets

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices

Ref: UL File#: **E 2 0 4 2 5 9**



W1DB50-3
W1DB75-3
W1DB100-3



W1DB50-4
W1DB75-4



W1DB50-5X
W1DB75-5X
W1DB100-5X

ONE-GANG BOXES | 2-5/8" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W1DB50-3	1/2"	3	23.8	GRAY	40
W1DB75-3	3/4"	3	23.8	GRAY	40
W1DB100-3	1"	3	23.8	GRAY	40
W1DB50-4	1/2"	4	23.8	GRAY	40
W1DB75-4	3/4"	4	23.8	GRAY	40
W1DB50-5X	1/2"	5	23.8	GRAY	40
W1DB75-5X	3/4"	5	23.8	GRAY	40
W1DB100-5X	1"	5	23.8	GRAY	40



A3

Two-gang Standard Boxes



W2B50-3
W2B75-3



W2B50-4
W2B75-4



W2B50-5
W2B75-5



W2B50-5X
W2B75-5X



W2B50-6X
W2B75-6X



W2B50-7
W2B75-7



W2B50-7X
W2B75-7X



W2B50-9
W2B75-9





TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 4- $\frac{9}{16}$ ", height 4- $\frac{1}{2}$ ", depth 2"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 3, 4, 5, 6, 7, or 9 outlet holes
- :: Hole size: available in $\frac{1}{2}$ " or $\frac{3}{4}$ " threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included
- :: "X" denotes boxes with side outlets

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices

Ref: UL File#: **E 2 0 4 2 5 9**

TWO-GANG STANDARD BOXES | 2"

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W2B50-3	$\frac{1}{2}$ "	3	30.5	GRAY	40
W2B75-3	$\frac{3}{4}$ "	3	30.5	GRAY	40
W2B50-4	$\frac{1}{2}$ "	4	30.5	GRAY	40
W2B75-4	$\frac{3}{4}$ "	4	30.5	GRAY	40
W2B50-5	$\frac{1}{2}$ "	5	30.5	GRAY	40
W2B75-5	$\frac{3}{4}$ "	5	30.5	GRAY	40
W2B50-5X	$\frac{1}{2}$ "	5	30.5	GRAY	24
W2B75-5X	$\frac{3}{4}$ "	5	30.5	GRAY	24
W2B50-6X	$\frac{1}{2}$ "	6	30.5	GRAY	20
W2B75-6X	$\frac{3}{4}$ "	6	30.5	GRAY	20
W2B50-7	$\frac{1}{2}$ "	7	30.5	GRAY	40
W2B75-7	$\frac{3}{4}$ "	7	30.5	GRAY	40
W2B50-7X	$\frac{1}{2}$ "	7	30.5	GRAY	20
W2B75-7X	$\frac{3}{4}$ "	7	30.5	GRAY	20
W2B50-9	$\frac{1}{2}$ "	9	30.5	GRAY	24
W2B75-9	$\frac{3}{4}$ "	9	30.5	GRAY	24



A5

Two-gang Deep Boxes



W2DB50-5
W2DB75-5
W2DB100-5



WD2B50-7X
W2DB75-7X
W2DB100-7X

TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 4-9/16", height 4-1/2", depth 2-5/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 5 or 7 outlets
- :: Hole sizes: available in 1/2", 3/4", or 1" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included
- :: "X" denotes boxes with side outlet

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices

Ref: **UL** File#: **E 2 0 4 2 5 9**

TWO-GANG DEEP BOXES | 2-5/8"

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W2DB50-5	1/2"	5	40.3	GRAY	20
W2DB75-5	3/4"	5	40.3	GRAY	20
W2DB100-5	1"	5	40.3	GRAY	20
W2DB50-7X	1/2"	7	40.3	GRAY	20
W2DB75-7X	3/4"	7	40.3	GRAY	20
W2DB100-7X	1"	7	40.3	GRAY	20





TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 6-3/8", height 4-1/2", depth 2-5/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 7 outlets
- :: Hole sizes: available in 1/2", 3/4" or 1" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduits
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: Use as a weatherproof junction box or to install receptacles, switches and GFCI devices

Ref: **UL** File#: **E 2 0 4 2 5 9**



W3DB50-7
W3DB75-7
W3DB100-7

THREE-GANG DEEP BOXES | 2-5/8" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W3DB50-7	1/2"	7	54.0	GRAY	10
W3DB75-7	3/4"	7	54.0	GRAY	10
W3DB100-7	1"	7	54.0	GRAY	10



A7



TECHNICAL SPECIFICATIONS:

- :: Dimensions:
width 2-3/4", height 4-9/16", depth 1-3/8"
width 2-3/4", height 4-9/16", depth 1-9/16" - flanged extension box
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 4 or 6 outlets
- :: Hole size: available in 1/2" or 3/4" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (Shrink-wrapped with barcode)
- :: Closure plugs, foam gaskets & mounting screws are included

APPLICATION:

- :: Used with one-gang weatherproof box when additional wiring space is required

Ref: UL File#: **E 2 0 4 2 5 9**

WXB50-4
WXB75-4

WXB50-6
WXB75-6

ONE-GANG EXTENSION BOXES | 1-3/8" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
WXB50-4	1/2"	4	9.5	GRAY	20
WXB75-4	3/4"	4	9.5	GRAY	20
WXB50-6	1/2"	6	9.5	GRAY	20
WXB75-6	3/4"	6	9.5	GRAY	20


WXF50-4
WXF75-4

WXF50-6
WXF75-6

ONE-GANG FLANGED EXTENSION BOXES | 1-9/16" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
WXF50-4	1/2"	4	13.5	GRAY	20
WXF75-4	3/4"	4	13.5	GRAY	20
WXF50-6	1/2"	6	13.5	GRAY	20
WXF75-6	3/4"	6	13.5	GRAY	20





W2XB50-6
W2XB75-6



W2XB50-8

TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 4-9/16", height 4-1/2", depth 1-3/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 6 or 8 outlets
- :: Hole sizes: available in 1/2" or 3/4" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included

APPLICATION:

- :: Used with two-gang weatherproof box when additional wiring space is required

Ref: **UL** File#: **E 2 0 4 2 5 9**

TWO-GANG EXTENSION BOXES | 1-9/16" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W2XB50-6	1/2"	6	15.0	GRAY	20
W2XB75-6	3/4"	6	15.0	GRAY	20
W2XB50-8	1/2"	8	15.0	GRAY	20



WXR-1



WXR-2

TECHNICAL SPECIFICATIONS:

- :: Dimensions:
 - 1-gang: width 2-3/4" height 4-1/2" depth 1"
 - 2-gang: width 4-9/16" height 4-1/2" depth 1"
- :: Material: die-cast aluminum with powder-coated finish
- :: Includes gasket and mounting hardware

EXTENSION RINGS | 1" DEEP

ITEM NO.	DESCRIPTION	CUBIC INCH	COLOR	STD. PKG.
WXR-1	SINGLE GANG	10	GRAY	24
WXR-2	TWO GANG	16.3	GRAY	20



A9



TECHNICAL SPECIFICATIONS:

- :: Dimensions: 4" diameter x 1-½" deep
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: 5 holes (round box) / 4 holes (round extension ring)
- :: Hole size: available with ½" or ¾" outlets
- :: Color: gray (select items available in white and bronze)

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations - NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, ground screw included.
- :: Weatherproof rings include closure plugs and gasket

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: Used as weatherproof junction boxes or to install round cluster covers and lamp holder combinations. Extension rings are used in conjunction with 4" round weatherproof boxes when additional wiring space is required.

Ref: UL File#: **E 2 0 4 2 5 9**

WRB50-5
WRB75-5

WXR50-4
WXR75-4

ROUND EXTENSION BOXES | 4"

ITEM NO.	DESCRIPTION	TRADE SIZE	OUTLET HOLES	CUBIC IN.	COLOR	STD. PKG.
WRB50-5	ROUND BOXES	½"	5	15.8	GRAY	40
WRB50-5-W	ROUND BOXES	½"	5	15.8	WHITE	40
WRB50-5-BRZ	ROUND BOXES	½"	5	15.8	BRONZE-	40
WRB75-5	ROUND BOXES	¾"	5	15.8	GRAY	40

ROUND EXTENSION RINGS | 4"

ITEM NO.	DESCRIPTION	TRADE SIZE	OUTLET HOLES	CUBIC IN.	COLOR	STD. PKG.
WXR50-4	ROUND EXT. RINGS	½"	4	19.0	GRAY	20
WXR75-4	ROUND EXT. RINGS	¾"	4	19.0	GRAY	20





WRC-1



WRC-2



WRC-3

TECHNICAL SPECIFICATIONS:

- :: Dimensions: 4" diameter
- :: Hole sizes: 1/2" & blank (flat)
- :: Color: gray; also available in white on selected items only; blank cover available in galvanized steel

PRODUCT FEATURES:

- :: Powder-coated finish
- :: Weather protection and scratch resistant
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Foam gaskets and installation hardware included

APPLICATIONS:


- :: Used when an outdoor outlet requires weatherproof protection

Ref: UL File#: **E 2 1 3 7 8 4**

Ref: UL File#: **E 2 0 4 2 5 9**

ROUND COVERS | 4"

ITEM NO.	OUTLET HOLES	TRADE SIZE	COLOR	STD. PKG.
WRC-1	1	1/2"	GRAY	50
WRC-1-W	1	1/2"	WHITE	50
WRC-1-BRZ	1	1/2"	BRONZE	50
WRC-2	2	1/2"	GRAY	50
WRC-2-W	2	1/2"	WHITE	50
WRC-2-BRZ	2	1/2"	BRONZE	50
WRC-3	3	1/2"	GRAY	50

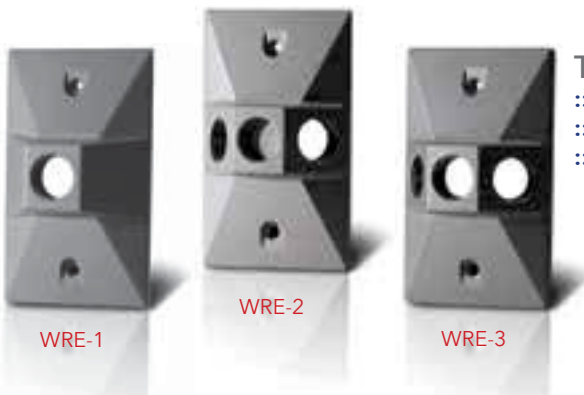

TECHNICAL SPECIFICATIONS:

- :: Dimensions: 2-3/4" (w) x 4-1/2" (h)
- :: Material: die-cast aluminum with powder-coated finish
- :: Color: gray

ONE-GANG RECTANGULAR COVERS

ITEM NO.	OUTLET HOLES	TRADE SIZE	COLOR	STD. PKG.
WRE-1*	1	1/2"	GRAY	50
WRE-2*	2	1/2"	GRAY	50
WRE-3	3	1/2"	GRAY	50

*Available in bronze



A11

One-gang Device Covers



W1BC

W1BC-G

W1C-DV

W1C-GV



W1CPO20

W1CPO30

W1CPO40



W1C-SV

W1C-SW

W1C-SW-S



W1C-TS

W1C-DH

W1C-GH





TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 2-7/8" height 4-5/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Color: gray (select items available in white*)
Exception: W1BC = aluminum & W1BC-G = (galvanized)

PRODUCT FEATURES:

- :: Self-closing lids protecting the receptacle when not in use
- :: Durable powder-coated finish
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Gaskets and installation hardware included

APPLICATION:

- :: Used when an outdoor outlet or switch requires weatherproof protection

Ref: **UL** File#: **E 204259**

ONE-GANG DEVICE COVERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
W1BC	BLANK COVER	GRAY	100
W1BC-G	HEAVY DUTY GALVANIZED BLANK COVER	GRAY	100
W1C-DV	DUPLEX, VERTICAL	GRAY	50
W1C-GV	GFCI, VERTICAL – GFCI NOT INCLUDED	GRAY	50
W1C-GV-WH*	GFCI, VERTICAL – GFCI NOT INCLUDED	WHITE	50
W1C-PO20	20A RECEPTACLE, 1.60" DIAMETER, VERTICAL	GRAY	50
W1C-PO30	30A RECEPTACLE, 1.75" DIAMETER, VERTICAL	GRAY	50
W1C-PO40	40-50A RECEPTACLE, 2.30" DIAMETER, VERTICAL	GRAY	50
W1C-SV	SINGLE RECEPTACLE, VERTICAL	GRAY	50
W1C-SW	1 LEVER, VERTICAL, SWITCH NOT INCLUDED	GRAY	50
W1C-SW-S	1 LEVER, 15A SINGLE POLE SWITCH INCLUDED, VERTICAL	GRAY	50
W1C-TS	TOGGLE SWITCH, VERTICAL	GRAY	50
W1C-DH	DUPLEX, HORIZONTAL	GRAY	50
W1C-GH	GFCI, HORIZONTAL – GFCI NOT INCLUDED	GRAY	50
W1C-GH-WH*	GFCI, HORIZONTAL – GFCI NOT INCLUDED	WHITE	50

*Available in white on selected items



A13

Two-gang Device Covers



W2BC



W2BC-G



W2C-2D



W2C-2G



W2C-2S



W2C-GD



W2C-GS



W2C-SD



W2C-SW



W2CL-PO50



W2CL-PO60



W2C-DH





TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 4-9/16" height 4-1/2"
- :: Material: die-cast aluminum with Powder-coated finish
- :: Color: gray (except W2BC (aluminum) or W2BC-G (galvanized))

PRODUCT FEATURES:

- :: Self-closing lids protect the receptacle when not in use
- :: Durable powder-coated finish
- :: UV protected and scratch resistant
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Gaskets and installation hardware included

APPLICATION:

- :: Used when an outdoor outlet requires weatherproof protection

Ref: **UL** File#: **E 2 0 4 2 5 9**

TWO-GANG DEVICE COVERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
W2BC	BLANK COVER	ALUM	50
W2BC-G	HEAVY DUTY GALVANIZED BLANK COVER	GALV	50
W2C-2D	2 DUPLEX RECEPTACLES	GRAY	50
W2C-2G	2 GFCI/DECORA RECEPTACLES	GRAY	50
W2C-2S	2 SINGLE RECEPTACLES 1.406" DIAMETER	GRAY	50
W2C-GD	1 GFCI & 1 DUPLEX RECEPTACLE	GRAY	50
W2C-GS	1 GFCI & 1 SINGLE RECEPTACLE	GRAY	50
W2C-SD	1 DUPLEX & 1 SINGLE RECEPTACLE 1.41" DIAMETER	GRAY	50
W2C-SW	2 LEVERS + 2-15A SINGLE POLE SWITCHES -not included	GRAY	50
W2CL-PO50	40-50A RECEPTACLE, 2.125" DIAMETER, LOCKABLE	GRAY	50
W2CL-PO60	60A RECEPTACLE, 2.468" DIAMETER, LOCKABLE	GRAY	50
W2C-DH	1 OVER-SIZED DUPLEX, HORIZONTAL	GRAY	50



A15



TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 6-3/8", height 4-1/2"
- :: Material: die-cast aluminum with powder-coated finish
- :: Color: gray
- Exception: W3BC = aluminum

PRODUCT FEATURES:

- :: Self-closing lids protect the receptacle when not in use
- :: Durable powder-coated finish
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Gasket and installation hardware included

APPLICATION:

- :: Used when an outdoor outlet requires weatherproof protection

Ref: UL File#: **E 2 0 4 2 5 9**


W3BC



W3C-3D



W3C-3G



W3C-3S

THREE-GANG DEVICE COVERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
W3BC	BLANK COVER	ALUM	20
W3C-3D	3 DUPLEX RECEPTACLES	GRAY	20
W3C-3G	3 GFCI/DECORA RECEPTACLES	GRAY	20
W3C-3S	3 SINGLE 1.41" DIAMETER RECEPTACLES	GRAY	20




IUC1V
(closed)


IUC1V


IUC2V
(closed)


IUC2V

TECHNICAL SPECIFICATIONS:

- :: Depth: 2-3/4" (one-gang), 2-1/4" (two-gang)
- :: Material: high-impact UV stabilized polycarbonate
- :: NEMA 3R rated, meets NEC 410-57b requirements
- :: For 16 gauge cords sets or smaller
- :: Color: black device plate with clear "see through" cover
- :: Rated for 15 & 20 amp devices, 120-250 volt

PRODUCT FEATURES:

- :: Available in 1 or 2 gang configurations with interchangeable inserts included
- :: All snap in inserts are included for maximum versatility
- :: Device plates install in seconds
- :: Impact resistant UV stabilized polycarbonate
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Gaskets and installation hardware included

APPLICATIONS:

- :: Used in wet locations to provide weatherproof protection while cords are in-use
- :: For use with receptacles or switches

Ref: UL File#: **E 2 3 6 9 3 2**

1-gang device inserts included



2-gang device inserts included



INTERCHANGEABLE INSERTS

Meets 2002 NEC 406.8 (B) Code
15 and 20 Amps, 125V receptacles installed outdoors in wet locations shall have an enclosure that is weatherproof whether or not the attachment plug cap is inserted.

IN-USE WEATHERPROOF COVERS | 1-9/16" DEEP

ITEM NO.	DESCRIPTION	GANG	COLOR	STD. PKG.
IUC1V	(1) DUPLEX/ GFCI TOGGLE	ONE	CLEAR	20
IUC2V	2-DUPLEX/ 2-GFCI/ 2-TOGGLE	TWO	CLEAR	20



A17



TECHNICAL SPECIFICATIONS:
:: Material: die-cast aluminum with powder-coated finish
:: Color: gray / bronze / black / white

PRODUCT FEATURES:
:: Durable powder-coated finish
:: Rated for PAR38 150 watt lamps (lamp not included)
:: Locking swivel knuckle for positive pinpoint directional aiming
:: Retail-ready packaging (shrink-wrapped with barcode)
:: It can be mounted on round or rectangular box covers ½" NPT
:: Combo pack, use UL-listed components only

Ref: **UL** File#: **E 3 4 9 8 7 4**



LAMP HOLDERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
LH150-1	WEATHERPROOF LAMP HOLDER, 120V PAR38 150W WITH GASKET	GRAY	50
LH150-COMBO-WH	2 X LH150 LAMP HOLDERS, 4" ROUND COVER, THUMB SCREW	WHITE	-
LH150-COMBO-BZ	2 X LH150 LAMP HOLDERS, 4" ROUND COVER, THUMB SCREW	BRONZE	-
LH150-COMBO-GR	2 X LH150 LAMP HOLDERS, 4" ROUND COVER, THUMB SCREW	GRAY	-





Ref: UL File#: E 2 0 4 2 5 9



LH150-GASKET



WRC-GASKET



WG-1

GASKETS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
LH150-GASKET	SILICON GASKET FOR LH150	BLACK	-
WRC-GASKET	GASKET FOR 4" ROUND COVER	BLACK	-
WG-1	UNIVERSAL 1-GANG FOAM GASKET	BLACK	50



PL-50



PL-75



PL-100

PLUGS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
PL-50	1/2" W/P CLOSE-UP PLUG	GRAY	20
PL-75	3/4" W/P CLOSE-UP PLUG	GRAY	20
PL-100	1" W/P CLOSE-UP PLUGS	GRAY	20



LUG 00

MOUNT LUG

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
LUG 00	TWO HOLE MOUNTING LUG FOR W/P BOX	GRAY	500



A19



Photo Electric Controls


PRODUCT FEATURE:

- :: Polycarbonate construction
- :: Ideal for dusk to dawn operation
- :: 1/2 NPT threads fit into 1/2" weather proof box outlets
- :: Wet location listed (NEMA 3R rated)
- :: Full one year warranty

Ref: **UL** File#: **E 2 0 8 5 0 7**


PC-B1



PC-B1-W



PC-FS1



PC-FSB1



PC-SM1



PC-SMWS1



PC-B2



PC-SM2

PHOTOCONTROLS | 120V

ITEM NO.	DESCRIPTION	RATING
PC-B1	BUTTON PHOTOCONTROL 120V MAX 500W	120V/ 500W
PC-B1-W	BUTTON PHOTOCONTROL 120V WITH WALL PLATE MAX 500W	120V/ 500W
PC-FS1	PHOTOCONTROL SWIVEL 120V MAX 1800W	120V/ 1800W
PC-FSB1	PHOTOCONTROL SWIVEL 120V RAIN TIGHT MAX 1800W	120V/ 1800W
PC-SM1	STEM-MOUNT PHOTOCONTROL 120V MAX 1800W	120V/ 1800W
PC-SMWS1	STEM-MOUNT PHOTOCONTROL WITH SWIVEL 120V MAX 1800W	120V/ 1800W

PHOTOCONTROLS | 240V & 277V

ITEM NO.	DESCRIPTION	RATING
PC-B2	BUTTON PHOTOCONTROL 240V MAX 500W	240V/ 500W
PC-SM2	STEM-MOUNT PHOTOCONTROL 240V MAX 1800W	240V/ 1800W





SLB series



T series



C series



LR series



LL series



LB series



conduit bodies

Westgate's wide variety of UL-listed conduit bodies are designed to meet a wide range of applications for jobs in residential, commercial and industrial situations. Conduit body covers and gaskets are made of the highest quality materials and are designed to withstand the most abusive environments.

B1

cover & gasket
included**TECHNICAL SPECIFICATIONS:**

- :: UL listed
- :: Trade size: available from 1/2" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:


- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label

APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.



Available sizes from
1/2" to 4"

Ref: **UL** File#: **E 2 0 3 9 1 3****THREADED CONDUIT BODIES | TYPE "LB" SERIES**

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD. PKG.	
		A	B	C		INNER	MASTER
LB-50CG	1/2"	4-5/16"	1-5/16"	2-11/32"	GRAY	10	50
LB-75CG	3/4"	5-3/32"	1-9/16"	2-5/8"	GRAY	10	40
LB-100CG	1"	5-29/32"	1-13/16"	3"	GRAY	5	50
LB-125CG	1-1/4"	7-13/16"	2-1/2"	3-3/4"	GRAY	2	40
LB-150CG	1-1/2"	7-13/16"	2-1/2"	3-3/4"	GRAY	2	50
LB-200CG	2"	10-1/16"	3-3/16"	4-3/4"	GRAY	1	50
LB-250CG	2-1/2"	12-13/16"	4-1/2"	5-9/16"	GRAY	-	50
LB-300CG	3"	12-13/16"	4-1/2"	6-5/32"	GRAY	-	40
LB-400CG	4"	15-5/8"	5-9/16"	7-9/16"	GRAY	-	50





Available sizes from
1/2" to 4"



TECHNICAL SPECIFICATIONS:

- :: UL listed
- :: Trade size: available from 1/2" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover


PRODUCT FEATURES:

- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (Phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label

APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.

Ref: **UL** File#: **E 2 0 3 9 1 3**



THREADED CONDUIT BODIES | TYPE "LL" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD. PKG.	
		A	B	C		INNER	MASTER
LL-50CG	1/2"	4-5/16"	2-1/32"	1-5/8"	GRAY	10	100
LL-75CG	3/4"	5-3/32"	2-5/16"	1-7/8"	GRAY	10	50
LL-100CG	1"	5-29/32"	2-1/16"	2-1/8"	GRAY	5	25
LL-125CG	1-1/4"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LL-150CG	1-1/2"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LL-200CG	2"	10-1/16"	4-9/32"	3-5/8"	GRAY	1	5
LL-250CG	2-1/2"	12-13/16"	5-7/8"	4-1/4"	GRAY	-	1
LL-300CG	3"	12-13/16"	5-7/8"	4-3/4"	GRAY	-	1
LL-400CG	4"	15-5/8"	7-21/32"	5-7/8"	GRAY	-	1

B2

LL Series



B3

**TECHNICAL SPECIFICATIONS:**

- :: UL listed
- :: Trade size: available from 1/2" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:

- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (Phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label


APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.



Available sizes from
1/2" to 4"

Ref: **UL** File#: **E 2 0 3 9 1 3**

**THREADED CONDUIT BODIES | TYPE "LR" SERIES**

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD. PKG.	
		A	B	C		INNER	MASTER
LR-50CG	1/2"	4-5/16"	2-1/32"	1-5/8"	GRAY	10	100
LR-75CG	3/4"	5-3/32"	2-5/16"	1-7/8"	GRAY	10	50
LR-100CG	1"	5-29/32"	2-11/16"	2-1/8"	GRAY	5	25
LR-125CG	1-1/4"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LR-150CG	1-1/2"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LR-200CG	2"	10-1/16"	4-9/32"	3-5/8"	GRAY	1	5
LR-250CG	2-1/2"	12-13/16"	5-7/8"	4-1/4"	GRAY	-	1
LR-300CG	3"	12-13/16"	5-7/8"	4-3/4"	GRAY	-	1
LR-400CG	4"	15-5/8"	7-21/32"	5-7/8"	GRAY	-	1





TECHNICAL SPECIFICATIONS:

- :: UL listed
- :: Trade size: Available from 1/2" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:

- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label


APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.

Ref: **UL** File#: **E 2 0 3 9 1 3**



Available sizes from
1/2" to 4"



THREADED CONDUIT BODIES | TYPE "C" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD. PKG.	
		A	B	C		INNER	MASTER
C-50CG	1/2"	4-11/16"	1-5/16"	1-5/8"	GRAY	10	100
C-75CG	3/4"	5-1/2"	1-9/16"	1-7/8"	GRAY	10	50
C-100CG	1"	6-7/16"	1-13/16"	2-1/8"	GRAY	5	25
C-125CG	1-1/4"	8-3/8"	2-1/2"	2-3/4"	GRAY	2	10
C-150CG	1-1/2"	8-3/8"	2-1/2"	2-3/4"	GRAY	2	10
C-200CG	2"	10-9/16"	3-3/16"	3-5/8"	GRAY	1	5
C-250CG	2-1/2"	13-1/2"	4-1/2"	4-1/4"	GRAY	-	1
C-300CG	3"	13-1/2"	4-1/2"	4-3/4"	GRAY	-	1
C-400CG	4"	16-5/16"	5-9/16"	5-7/8"	GRAY	-	1

B4

C Series



B5

cover & gasket
includedAvailable sizes from
1/2" to 4"**TECHNICAL SPECIFICATIONS:**


- :: UL listed
- :: Trade size: available from 1/2" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:

- :: Complete with cover & gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label

APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.

Ref: **UL** File#: **E 2 0 3 9 1 3****THREADED CONDUIT BODIES | TYPE "T" SERIES**

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD. PKG.	
		A	B	C		INNER	MASTER
T-50CG	1/2"	4-11/16"	2-1/32"	1-5/8"	GRAY	10	100
T-75CG	3/4"	5-1/2"	2-5/16"	1-7/8"	GRAY	10	50
T-100CG	1"	6-7/16"	2-11/16"	2-1/8"	GRAY	5	25
T-125CG	1-1/4"	8-3/8"	3-1/2"	2-3/4"	GRAY	2	10
T-150CG	1-1/2"	8-3/8"	3-1/2"	2-3/4"	GRAY	2	10
T-200CG	2"	10-9/16"	4-9/32"	3-5/8"	GRAY	1	5
T-250CG	2-1/2"	13-1/2"	5-7/8"	4-1/4"	GRAY	-	1
T-300CG	3"	13-1/2"	5-7/8"	4-3/4"	GRAY	-	1
T-350CG	3-1/2"	16-5/16"	7-21/32"	5-7/8"	GRAY	-	1
T-400CG	4"	16-5/16"	7-21/32"	5-7/8"	GRAY	-	1






TECHNICAL SPECIFICATIONS:

- :: UL listed
- :: Trade size: available from 1/2" through 1" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat body and cover
- :: SLB body is fully assembled; shrink wrapped with UPC bar code label

Ref: **UL** File#: **E 3 5 2 5 7 8**




Available sizes from
1/2" to 1"



THREADED CONDUIT BODIES | TYPE "SLB" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD. PKG.	
		A	B	C		INNER	MASTER
SLB-50	1/2"	3-9/32"	1-3/8"	1-5/8"	GRAY	20	100
SLB-75	3/4"	3-19/32"	1-9/16"	1-27/32"	GRAY	20	50
SLB-100	1"	4-5/16"	1-31/32"	2-1/8"	GRAY	20	50

Ref: **UL** File#: **E 2 0 4 2 5 9**



COVERS & GASKETS for threaded conduit bodies

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD. PKG.	
		A	B	C		INNER	MASTER
CG-50	1/2"	3-7/8"	1-5/16"	-	GRAY	50	250
CG-75	3/4"	4-11/16"	1-9/16"	-	GRAY	50	250
CG-100	1"	5-3/8"	1-3/4"	-	GRAY	50	200
CG-125/150	1-1/4" & 1-1/2"	7-5/16"	2-1/2"	-	GRAY	-	100
CG-200	2"	9-1/2"	3-1/8"	-	GRAY	5	25
CG-250/300	2-1/2" & 3"	12-1/16"	4-7/16"	-	GRAY	-	20
CG-350/400	3-1/2" & 4"	15-1/16"	5/9/2016	-	GRAY	-	10

B6

SLB Series / Cover & Gaskets



EMT



fittings



straps

liquid tight

BX-flex



pull elbows



nipples



non-metallic cable

conduit



rigid-IMC

fish tapes



ground fittings



electrical fittings

Westgate offers a broad range of electrical fittings made of high quality materials. Westgate's extensive product offering is designed to provide value, durability and quality delivered quickly into the hands of electrical professionals.

C1

EMT Fittings

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 4" EMT
- :: UL Listed
- :: Concrete-tight when taped
- :: Combination screw head (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join EMT thin wall conduits to electrical junction boxes or enclosures

Ref: **UL** File#: **E 3 1 5 2 8 1** - 1/2" to 2"
E 3 1 5 2 5 6 - 2-1/2" to 4"

DIE-CAST EMT SET SCREW CONNECTORS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
88036	1/2"	50	500
88037	3/4"	25	250
88038	1"	50	50
88039	1-1/4"	-	25
88040	1-1/2"	-	25
88041	2"	-	20
88042	2-1/2"	-	12
88043	3"	-	12
88044	3-1/2"	-	10
88045	4"	-	6

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 2" EMT
- :: UL Listed
- :: Insulated throat
- :: Concrete-tight when taped
- :: Combination screw head (Phillips, flat blade and pan head)

Ref: **UL** File#: **E 2 4 0 8 7 2**

DIE-CAST EMT SET SCREW CONNECTORS WITH INSULATED THROAT

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SCON-1I	1/2"	50	500
SCON-2I	3/4"	30	300
SCON-3I	1"	15	150
SCON-4I	1-1/4"	8	80
SCON-5I	1-1/2"	6	60
SCON-6I	2"	4	40





steel

FEATURES:

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: Concrete-tight when taped
- :: Combination screw head (Phillips, flat blade and pan head)
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to join EMT thin wall conduits to electrical junction boxes or enclosures

Ref: **UL** File#: **E 3 4 0 4 3 3****STEEL EMT SET SCREW CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
F7701	½"	50	500
F7702	¾"	25	250
F7703	1"	20	200
F7704	1-¼"	-	25
F7705	1-½"	-	25
F7706	2"	-	20
F7707	2-½"	-	12
F7708	3"	-	12
F7709	3-½"	-	6
F7710	4"	-	6



steel

FEATURES:

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: Concrete-tight when taped
- :: Large hex compression nut for better tool engagement
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 4 0 4 3 3****STEEL EMT COMPRESSION CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
F7601	½"	25	250
F7602	¾"	25	250
F7603	1"	10	100
F7604	1-¼"	-	25
F7605	1-½"	-	25
F7606	2"	-	15
F7607	2-½"	-	12
F7608	3"	-	12
F7609	3-½"	-	6
F7610	4"	-	6



C2

EMT Fittings



**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: With internal sealing ring and gasket
- :: Large hex compression nuts for better tool engagement
- :: Concrete-tight when taped
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 4 0 4 3 3****STEEL EMT RAIN-TIGHT
COMPRESSION CONNECTORS**

ITEM NO.		TRADE SIZE	STD. PKG.	
		INSULATED THROAT	INNER	MASTER
F7601-W	F7601-W-IS	½"	-	25
F7602-W	F7602-W-IS	¾"	-	25
F7603-W	F7603-W-IS	1"	-	10
F7604-W	F7604-W-IS	1-¼"	-	10
F7605-W	F7605-W-IS	1-½"	-	10
F7606-W	F7606-W-IS	2"	-	5
F7607-W	F7607-W-IS	2-½"	-	12
F7608-W	F7608-W-IS	3"	-	12
F7609-W	F7609-W-IS	3-½"	-	6
F7610-W	F7610-W-IS	4"	-	6

*Add IS for insulated throat

**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: With integral sealing gasket and lock nut
- :: Large hex compression nut for better tool engagement
- :: Concrete-tight when taped

APPLICATION:

- :: Used to join EMT thin wall conduit to electrical junction boxes or enclosures

Ref: **UL** File#: **E 2 4 0 8 7 2****DIE-CAST EMT RAIN-TIGHT
COMPRESSION CONNECTORS**

ITEM NO.		TRADE SIZE	STD. PKG.	
			INNER	MASTER
CCON-1-RT		½"	45	450
CCON-2-RT		¾"	30	300
CCON-3-RT		1"	18	180
CCON-4-RT		1-¼"	12	120
CCON-5-RT		1-½"	8	80
CCON-6-RT		2"	3	30
CCON-7-RT		2-½"	-	36
CCON-8-RT		3"	-	20
CCON-9-RT		3-½"	-	16
CCON-10-RT		4"	-	16

C3

EMT Fittings



**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: With integral sealing gasket and lock nut
- :: Large hex compression nut for better tool engagement
- :: Concrete-tight when taped

APPLICATION:

- :: Used to join EMT thin wall conduit to electrical junction boxes or enclosures

Ref: **UL** File#: **E 2 4 0 8 7 2**

DIE-CAST EMT COMPRESSION CONNECTORS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
CCON-1	½"	45	450
CCON-2	¾"	30	300
CCON-3	1"	18	180
CCON-4	1-¼"	12	120
CCON-5	1-½"	8	80
CCON-6	2"	3	30
CCON-7	2-½"	-	36
CCON-8	3"	-	20
CCON-9	3-½"	-	16
CCON-10	4"	-	16

**FEATURES:**

- :: Trade size: available from ½" to 2" EMT
- :: UL Listed
- :: Insulated throat for added protection against sharp edges
- :: Concrete-tight when taped
- :: Large hex compression nut for better tool engagement
- :: Lock washer included

Ref: **UL** File#: **E 2 4 0 8 7 2**

DIE-CAST EMT COMPRESSION CONNECTOR WITH INSULATED THROAT

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
CCON-1 I	½"	45	450
CCON-2 I	¾"	30	300
CCON-3 I	1"	18	180
CCON-4 I	1-¼"	12	120
CCON-5 I	1-½"	8	80
CCON-6 I	2"	3	30

C4



EMT Fittings



C5

EMT Fittings

**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: Concrete-tight when taped
- :: Combination screw head (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join two lengths of EMT conduit

Ref: **UL** File#: **E 3 1 5 2 8 1** - ½" to 2"
E 3 1 5 2 5 6 - 2-½" to 4"

DIE-CAST EMT SET SCREW COUPLINGS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
88062	½"	50	500
88063	¾"	25	250
88064	1"	50	200
88065	1-¼"	-	25
88066	1-½"	-	25
88067	2"	-	20
88068	2-½"	-	12
88069	3"	-	12
88070	3-½"	-	10
88071	4"	-	6

**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: Concrete-tight when taped
- :: Combination screw head (Phillips, flat blade and pan head)
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 4 0 4 3 3**

STEEL EMT SET SCREW COUPLINGS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
F7711	½"	50	500
F7712	¾"	25	250
F7713	1"	10	100
F7714	1-¼"	-	25
F7715	1-½"	-	20
F7716	2"	-	20
F7717	2-½"	-	12
F7718	3"	-	12
F7719	3-½"	-	6
F7720	4"	-	6



zinc
die-cast**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: Concrete-tight when taped
- :: Large hex compression nuts for better tool engagement

APPLICATION:

- :: Used to join two lengths of EMT thin wall conduits to extend the electrical raceway

Ref: **UL** File#: **E 2 4 0 8 7 2****DIE-CAST EMT COMPRESSION COUPLINGS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
CCOP-1	½"	35	350
CCOP-2	¾"	20	200
CCOP-3	1"	15	150
CCOP-4	1-¼"	8	80
CCOP-5	1-½"	5	50
CCOP-6	2"	2	20
CCOP-7	2-½"	-	18
CCOP-8	3"	-	15
CCOP-9	3-½"	-	12
CCOP-10	4"	-	8



steel

FEATURES:

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: Large hex compression nuts for better tool engagement
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 4 0 4 3 3****STEEL EMT COMPRESSION COUPLINGS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
F7611	½"	25	250
F7612	¾"	25	250
F7613	1"	10	100
F7614	1-¼"	-	25
F7615	1-½"	-	20
F7616	2"	-	15
F7617	2-½"	-	12
F7618	3"	-	6
F7619	3-½"	-	6
F7620	4"	-	6

C6



EMT Fittings



zinc
die-cast**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: With internal sealing rings
- :: Concrete-tight when taped
- :: Large hex compression nuts for better tool engagement

APPLICATION:

- :: Used to join two lengths of EMT thinwall conduits to extend the electrical raceway.

Ref: **UL** File#: **E 2 4 0 8 7 2****DIE-CAST EMT RAIN-TIGHT
COMPRESSION COUPLINGS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
CCOP-1-RT	½"	35	350
CCOP-2-RT	¾"	20	200
CCOP-3-RT	1"	15	150
CCOP-4-RT	1-¼"	8	80
CCOP-5-RT	1-½"	5	50
CCOP-6-RT	2"	2	20
CCOP-7-RT	2-½"	-	18
CCOP-8-RT	3"	-	15
CCOP-9-RT	3-½"	-	12
CCOP-10-RT	4"	-	12



steel

FEATURES:

- :: Trade size: available from ½" to 4" EMT
- :: UL Listed
- :: With internal sealing ring
- :: Large hex compression nut for better tool engagement
- :: Concrete-tight when taped
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 4 0 4 3 3****STEEL EMT RAIN-TIGHT
COMPRESSION COUPLINGS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
F7611-W	½"	-	25
F7612-W	¾"	-	25
F7613-W	1"	-	10
F7614-W	1-¼"	-	10
F7615-W	1-½"	-	10
F7616-W	2"	-	5
F7617-W	2-½"	-	12
F7618-W	3"	-	12
F7619-W	3-½"	-	6
F7620-W	4"	-	6



C7



EMT Fittings



**FEATURES:**

- :: Trade size: available in 1/2" & 3/4" EMT
- :: UL Listed
- :: Combination screw head (Phillips, flat blade and pan head)
- :: Eliminates the need to do time-consuming offset conduit bending before connecting conduits to junction boxes or enclosures.

APPLICATION:

- :: Used for proper offset of EMT conduits joining junction boxes or enclosures

Ref: **UL** File#: **E 2 4 0 8 7 2****DIE-CAST EMT SET SCREW OFFSET CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SCO-50	1/2"	-	100
SCO-75	3/4"	-	50

**FEATURES:**

- :: Trade size: available in 1/2" & 3/4" EMT
- :: UL Listed
- :: Large hex compression nut for better tool engagement
- :: Ideal for tight spaces where bending the conduit is not possible

Ref: **UL** File#: **E 2 4 0 8 7 2****DIE-CAST EMT COMPRESSION OFFSET CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
CCO-50	1/2"	-	100
CCO-75	3/4"	-	50

**FEATURES:**

- :: Trade size: available in 1/2" & 3/4" EMT
- :: UL Listed
- :: Ideal for tight spaces where bending the conduit is not possible
- :: Combination screw head (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to change the direction of EMT conduit runs in any direction by 90 degrees.

Ref: **UL** File#: **E 2 4 0 8 7 2****ZINC DIE-CAST EMT SET SCREW INSIDE-CORNER CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SIC-50	1/2"	-	100
SIC-75	3/4"	-	50

C8

EMT Fittings



C9



BX-Flex

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 2" flex
- :: UL Listed
- :: Lock washer included

APPLICATION:

- :: Used to join flexible metal conduit to box or enclosure

Ref: **UL** File#: **E 2 0 6 9 6 4****DIE-CAST FLEX SCREW-IN CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SICON-1	1/2"	60	600
SICON-2	3/4"	35	350
SICON-3	1"	15	150
SICON-4	1-1/4"	10	100
SICON-5	1-1/2"	6	60
SICON-6	2"	3	30

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 2" flex
- :: UL Listed
- :: With insulated throat
- :: Lock washer included

Ref: **UL** File#: **E 2 0 6 9 6 4****DIE-CAST FLEX SCREW-IN CONNECTOR WITH INSULATED THROATS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SICON-1 I	1/2"	60	600
SICON-2 I	3/4"	35	350
SICON-3 I	1"	15	150
SICON-4 I	1-1/4"	10	100
SICON-5 I	1-1/2"	6	60
SICON-6 I	2"	3	30



zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 2" flex
- :: UL Listed
- :: Fits all standard metal flex

APPLICATION:

- :: Used to join two lengths of flexible metal conduits

Ref: **UL** File#: **E 2 0 6 9 6 4****DIE-CAST FLEX SCREW-IN COUPLINGS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SICOP-1	1/2"	40	400
SICOP-2	3/4"	25	250
SICOP-3	1"	15	150
SICOP-4	1-1/4"	10	100
SICOP-5	1-1/2"	6	60
SICOP-6	2"	3	30

C10



BX-Flex

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 1"
- :: UL Listed
- :: Screw-in end for Flex, compression end for EMT
- :: Large hex compression nut for better tool engagement

APPLICATION:

- :: Used to join EMT to flexible metal conduit

Ref: **UL** File#: **E 2 4 0 8 7 2****DIE-CAST EMT TO FLEX COMPRESSION/
SCREW-IN COUPLINGS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
F1611	1/2"	-	50
F1612	3/4"	-	25
F1613	1"	-	10



zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 4" Flex
- :: UL Listed
- :: Combination screw head (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join flexible metal conduit to box or enclosure

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST FLEX SQUEEZE CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
82059	3/8"	50	500
82060	1/2"	25	250
82061	3/4"	25	250
82062	1"	10	100
82063	1-1/4"	10	100
82064	1-1/2"	5	50
82065	2"	10	40
82066	2-1/2"	-	10
82067	3"	-	10
82069	4"	-	1

zinc
die-cast**FEATURES:**

- :: Trade size: available from 3/8" to 1" flex
- :: 90° fitting
- :: UL Listed
- :: Combination screw head (Phillips, flat blade and pan head)

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST FLEX 90° SQUEEZE CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
84022	3/8"	50	500
84023	1/2"	25	250
84024	3/4"	10	100
84025	1"	5	50

**FEATURES:**

- :: Trade size: available in 3/8" Flex
- :: Combination screw head (Phillips, flat blade and pan head)
- :: UL Listed

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST FLEX SET SCREW CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
88201	3/8"	100	1000

zinc
die-cast

C11



BX-Flex





FEATURES:

- :: Trade size: available from ½" to 4" rigid or IMC
- :: Insulated throat
- :: O-ring silicon rubber gasket for water-tight seal

APPLICATION:

- :: Used as water-tight seal for rigid or IMC entering a box or enclosure

Ref: **UL** File#: **E 2 0 6 9 6 4**

DIE-CAST STEEL INSULATED
WATER-TIGHT HUBS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
WTH-1 I	½"	25	250
WTH-2 I	¾"	15	150
WTH-3 I	1"	8	80
WTH-4 I	1-¼"	6	60
WTH-5 I	1-½"	4	40
WTH-6 I	2"	3	0
WTH-7 I	2-½"	1	10
WTH-8 I	3"	1	10
WTH-9 I	3-½"	1	6
WTH-10 I	4"	1	6

C12



Water-tight Hubs



C13

Liquid Tight

**FEATURES:**

- :: Trade size: available from 3/8" to 2"
- :: UL listed
- :: Straight fitting
- :: PVC body with gasket and steel locknut
- :: Textured compression nut for improved grip

APPLICATION:

- :: For use with non-metallic liquid tight conduit

Ref: **UL** File#: **E 3 1 5 2 5 6****STRAIGHT NON-METALLIC LIQUID TIGHT CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
NMLT-38	3/8"	25	100
NMLT-50	1/2"	25	100
NMLT-75	3/4"	10	100
NMLT-100	1"	5	50
NMLT-125	1-1/4"	5	50
NMLT-150	1-1/2"	5	50
NMLT-200	2"	2	20

**FEATURES:**

- :: Trade size: available from 3/8" to 2"
- :: UL listed
- :: 90° angle fitting
- :: PVC body with gasket and steel Locknut
- :: For use with non-metallic liquid tight conduit

Ref: **UL** File#: **E 3 1 5 2 5 6****90° NON-METALLIC LIQUID TIGHT CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
NMLT90-38	3/8"	10	100
NMLT90-50	1/2"	10	100
NMLT90-75	3/4"	10	100
NMLT90-100	1"	5	50
NMLT90-125	1-1/4"	2	20
NMLT90-150	1-1/2"	2	20
NMLT90-200	2"	1	10



zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 4"
- :: UL listed
- :: Straight fitting
- :: Die cast fitting with gasket and lock nut

APPLICATION:

- :: For use with metallic liquid tight conduit

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST STRAIGHT LIQUID TIGHT CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
88116	1/2"	20	200
88117	3/4"	10	100
88118	1"	5	20
88119	1-1/4"	5	50
88120	1-1/2"	2	20
88121	2"	2	10
88122	2-1/2"	-	1
88123	3"	-	1
88125	4"	-	1

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 4"
- :: UL listed
- :: 90° angle die cast fitting with gasket and lock nut
- :: For use with metallic liquid tight conduit

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST 90° LIQUID TIGHT CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
85002	1/2"	10	100
85003	3/4"	10	100
85004	1"	5	50
85005	1-1/4"	2	20
85006	1-1/2"	2	20
85007	2"	1	10
85008	2-1/2"	-	1
85009	3"	-	1
85011	4"	-	1

C14



Liquid Tight



C15



Non-Metallic Cable



zinc die-cast

FEATURES:

- :: Trade size: available from 1/2" to 2"
- :: UL listed
- :: Two screw Romex connector
- :: Combination screw heads (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join non-metallic cable (NMC) to box or enclosure

Ref: UL File#: **E315256**

DIE-CAST ROMEX CONNECTOR, TWO SCREW

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
88019	1/2"	100	1000
88024	3/4"	50	500
88025	1"	25	250
88026	1-1/4"	10	100
88027	1-1/2"	5	50
88028	2"	10	40



zinc die-cast

FEATURES:

- :: Trade size: available for use with 3/8" flex or Romex
- :: UL listed
- :: Multi-purpose connector (flex & Romex)
- :: Combination screw heads (Phillips, flat blade and pan head)

Ref: UL File#: **E315256**

DIE-CAST COMBINATION CONNECTORS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
88003	3/8"	100	1000



zinc
die-cast**FEATURES:**

- :: Trade size: available in 3/8" MC / BX
- :: Multi-purpose saddle-type connector
- :: UL listed
- :: Insulated throat with lock nut

APPLICATION:

- :: Used to join armored or metal clad cable to box or enclosure

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST MC SADDLE TYPE CONNECTOR WITH BUSHING**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SAD-01	3/8"	100	500

zinc
die-cast**FEATURES:**

- :: Trade size: available in 3/8" MC / BX
- :: UL listed
- :: Multi-purpose saddle type connector
- :: Combo-head set-screw

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST SADDLE TYPE MC CONNECTORS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
82018	3/8"	50	500

zinc
die-cast**FEATURES:**

- :: Trade size: available in 1/2" K.O. for 3/8" MC / BX
- :: UL listed
- :: Multi-purpose duplex connector
- :: Combo-head set-screw

Ref: **UL** File#: **E 3 1 5 2 5 6****DIE-CAST DUPLEX CONNECTOR FOR AC, BX-FLEX, NM & MC CABLE**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
84001	1/2"	25	200

C16



Non-Metallic Cable



C17

Pull Elbows

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 1-1/4" EMT
- :: UL listed
- :: Removable cover for easy wire pulling
- :: Combination screw heads (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join EMT to box or enclosure at 90 degrees

Ref: **UL** File#: **E 2 0 6 9 6 4****DIE-CAST EMT TO BOX PULL ELBOWS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
PE-1EBG	1/2"	20	200
PE-2EBG	3/4"	15	150
PE-3EBG	1"	6	60
PE-4EBG	1-1/4"	3	30

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 1-1/4" EMT
- :: UL listed
- :: Removable cover for easy wire pulling
- :: Combination screw heads (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join two lengths of EMT at 90 degrees

Ref: **UL** File#: **E 2 0 6 9 6 4****DIE-CAST EMT TO EMT PULL ELBOWS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
PE-1EEG	1/2"	20	200
PE-2EEG	3/4"	15	150
PE-3EEG	1"	6	60
PE-4EEG	1-1/4"	3	30



zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 1-1/4" Rigid or IMC
- :: UL listed
- :: Removable cover for easy wire pulling
- :: Combination screw heads (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join threaded rigid or IMC conduit to box or enclosure at 90 degrees

Ref: **UL** File#: **E 2 0 6 9 6 4****DIE-CAST RIGID TO BOX PULL ELBOWS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
PE-1RBG	1/2"	20	200
PE-2RBG	3/4"	15	150
PE-3RBG	1"	6	60
PE-4RBG	1-1/4"	3	30

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 1-1/4"
- :: UL listed
- :: Combination screw heads (Phillips, flat blade and pan head)

APPLICATION:

- :: Used to join two lengths of threaded rigid or IMC conduit at 90 degrees

Ref: **UL** File#: **E 2 0 6 9 6 4****DIE-CAST RIGID TO RIGID PULL ELBOWS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
PE-1RRG	1/2"	20	200
PE-2RRG	3/4"	15	150
PE-3RRG	1"	6	60
PE-4RRG	1-1/4"	3	30

C18



Pull Elbows



EXCLUSIVE
PATENT-PENDING
TECHNOLOGY



zinc
die-cast

This time-saving product makes the job easier. The bending of bare wire is no longer necessarily since the lug may be rotated in 3 different positions.

FEATURES:

- :: No more loop
- :: Wire range: #14 through #4
- :: Available in 2 sizes of 1/2" and 3/4"
- :: Meets NEC (National Electric Code) requirements.

Ref: **UL** File#: **E 317815**

FEED-THROUGH ARMORED GROUND CLAMP

ITEM NO.	TRADE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
MVP94-50	1/2"	#14-4	-	125
MVP94-75	3/4"	#14-4	20	80



zinc
die-cast

FEATURES:

- :: Trade size: available from 1/2" to 4"
- :: Insulated bushing with ground lug
- :: Combination screw head (Phillips, flat blade and pan head) 1", insulated ground bushing, threaded type with set screw, bushing
- :: Material: Malleable Iron, Lug Material: Aluminum.
- :: Wire size: 14 AWG (solid) - 4 AWG (stranded). For copper or aluminum wire.

APPLICATION:

- :: Used with locknut to terminate rigid or IMC conduit to box

Ref: **UL** File#: **E 207816**



GROUND BUSHINGS INSULATED & LAY-IN LUG

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
GBILA-1	1/2"	50	500
GBILA-2	3/4"	40	400
GBILA-3	1"	25	250
GBILA-4	1-1/4"	25	250
GBILA-5	1-1/2"	25	250
GBILA-6	2"	10	100
GBILA-7	2-1/2"	5	50
GBILA-8	3"	5	50
GBILA-9	3-1/2"	4	40
GBILA-10	4"	4	40

C19

Rigid-IMC Conduit





pvc

FEATURES:

- :: Trade size: available from ½" to 4"
- :: UL listed
- :: Smooth rounded entrance

APPLICATION:

- :: Used with locknut to terminate rigid or IMC conduit to box

Ref: **UL** File#: **E 2 0 7 8 1 6****PLASTIC BUSHINGS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
PLB-50	½"	200	2000
PLB-75	¾"	100	1000
PLB-100	1"	50	500
PLB-125	1-¼"	25	250
PLB-150	1-½"	25	250
PLB-200	2"	50	500
PLB-250	2-½"	10	100
PLB-300	3"	10	100
PLB-350	3-½"	10	100
PLB-400	4"	10	100

zinc
die-cast**FEATURES:**

- :: Trade size: available from ½" to 4"
- :: With insulated throat
- :: Combo-head set-screw

APPLICATION:

- :: Used with locknut to terminate rigid or IMC conduit to box

Ref: **UL** File#: **E 2 0 7 8 1 6****DIE-CAST CONDUIT BUSHINGS WITH INSULATED THROAT**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
GBI-1	½"	140	1400
GBI-2	¾"	100	1000
GBI-3	1"	50	500
GBI-4	1-¼"	30	300
GBI-5	1-½"	20	200
GBI-6	2"	15	150
GBI-7	2-½"	7	70
GBI-8	3"	5	50
GBI-9	3-½"	4	40
GBI-10	4"	2	20

C20



Rigid-IMC Conduit



C21



steel

FEATURES:

- :: Trade size: available from 1/2" ~ 3/8" to 2" ~ 1-1/2"
- :: Reducing bushing
- :: Threaded inside and outside
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to reduce size of internal female threads

STEEL REDUCING BUSHINGS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
RB-50/38	1/2" ~ 3/8"	-	500
RB-75/50	3/4" ~ 1/2"	-	250
RB-100/50	1" ~ 1/2"	-	150
RB-100/75	1" ~ 3/4"	-	150
RB-125/50	1-1/4" ~ 1/2"	-	100
RB-125/75	1-1/4" ~ 3/4"	-	100
RB-125/100	1-1/4" ~ 1"	-	100
RB-150/50	1-1/2" ~ 1/2"	-	75

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
RB-150/75	1-1/2" ~ 3/4"	-	75
RB-150/100	1-1/2" ~ 1"	-	75
RB-150/125	1-1/2" ~ 1-1/4"	-	75
RB-200/50	2" ~ 1/2"	-	40
RB-200/75	2" ~ 3/4"	-	40
RB-200/100	2" ~ 1"	-	40
RB-200/125	2" ~ 1-1/4"	-	40
RB-200/150	2" ~ 1-1/2"	-	40



steel

FEATURES:

- :: Trade size: available from 1/2" to 2"
- :: Fully threaded steel coupling
- :: Galvanized finish
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to connect rigid or IMC conduit

RIGID THREADED COUPLINGS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
RTC-50	1/2"	-	100
RTC-75	3/4"	-	50
RTC-100	1"	-	30
RTC-125	1-1/4"	-	20
RTC-150	1-1/2"	-	20
RTC-200	2"	-	20





steel

FEATURES:

- :: Trade size: available from 1/2" to 4"
- :: Full cut internal threads
- :: Zinc-plated
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 2 0 6 9 6 4**

C22



Rigid-IMC Conduit

**STEEL CONDUIT LOCKNUTS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
LNS-50	1/2"	-	1000
LNS-75	3/4"	-	1000
LNS-100	1"	-	1000
LNS-125	1-1/4"	-	300
LNS-150	1-1/2"	-	300
LNS-200	2"	-	250
LNS-250	2-1/2"	-	125
LNS-300	3"	-	125
LNS-350	3-1/2"	-	100
LNS-400	4"	-	100



steel

FEATURES:

- :: Trade size: available from 3/4" ~ 1/2" to 4" ~ 2-1/2"
- :: Stamped 20 ga steel
- :: Galvanized finish
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to reduce the K.O. size

STEEL REDUCING WASHERS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
RWS-75/50	3/4" ~ 1/2"	-	250
RWS-100/50	1" ~ 1/2"	-	250
RWS-100/75	1" ~ 1/2"	-	250
RWS-125/50	1-1/4" ~ 1/2"	-	100
RWS-125/75	1-1/4" ~ 3/4"	-	100
RWS-125/100	1-1/4" ~ 1"	-	100
RWS-150/50	1-1/2" ~ 1/2"	-	100
RWS-150/75	1-1/2" ~ 3/4"	-	100
RWS-150/100	1-1/2" ~ 1"	-	100

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
RWS-150/125	1-1/2" ~ 1-1/4"	-	100
RWS-200/50	2" ~ 1/2"	-	50
RWS-200/75	2" ~ 1/2"	-	50
RWS-200/100	2" ~ 1"	-	50
RWS-200/125	2" ~ 1-1/4"	-	100
RWS-200/150	2" ~ 1-1/2"	-	50
RWS-250/100	2-1/2" ~ 1"	-	25
RWS-250/200	2-1/2" ~ 2"	-	25
RWS-400/250	4" ~ 2-1/2"	-	25



C23

Ground Fittings



bronze

**FEATURES:**

- :: Trade size: available from 1/2" ~ 6"
- :: Galvanized flat head steel screws
- :: Direct burial ground clamp
- :: Lug accepts 2 through 10 gauge wire

APPLICATION:

- :: Used to join bare copper ground wire to pipe

Ref: **UL** File#: **E 2 0 7 8 1 6****BRONZE BARE GROUND CLAMPS**

ITEM NO.	TRADE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
K-11	1/2" ~ 1"	2-10	-	175
K-22	1-1/4" ~ 2"	2-10	-	50
K-4	2-1/2" ~ 4"	2-10	-	15
K-8	4-1/2" ~ 6"	2-10	-	6



bronze

**FEATURES:**

- :: Trade size: available from 1/2"~1" to 1/4"~2"
- :: Bronze screws
- :: Lug accepts 2 through 10 gauge wire

Ref: **UL** File#: **E 2 0 7 8 1 6****BRONZE DIRECT BURIAL GROUND CLAMPS**

ITEM NO.	TRADE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
K-11D	1/2" ~ 1"	8-4	-	200
K-12D	1/2" ~ 1"	10-2	-	175
K-22D	1/2" ~ 1-1/2"	10-2	-	150
K-5D	1-1/4" ~ 2"	10-2	-	50

zinc
die-cast**FEATURES:**

- :: Trade size: available in 1/2"~1"
- :: Die-cast zinc aluminum with steel screws
- :: Bare ground clamp
- :: Flat head screw
- :: Lug accepts 2 through 10 gauge wire

Ref: **UL** File#: **E 2 0 7 8 1 6****DIE-CAST ALUM BARE GROUND CLAMPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
CZ-11	1/2" ~ 1"	25	250





bronze

**FEATURES:**

- :: Trade size: available from 1/2" ~ 6" pipe
- :: For use with armored ground cable
- :: Galvanized flat head steel screws

APPLICATION:

- :: Used to join armored ground cable to pipe

Ref: UL File#: **E 2 0 7 8 1 6****BRONZE ARMORED GROUND CLAMPS**

ITEM NO.	TRADE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
K-6	1/2" ~ 1"	4-6-8	-	115
K-7	1-1/4" ~ 2"	4-6-8	-	50
K-71	2-1/2" ~ 4"	4-6-8	-	16
K-72	4-1/2" ~ 6"	4-6-8	-	5



bronze

**FEATURES:**

- :: Trade size: available from 1/2" ~ 1" pipe
- :: Galvanized flat head steel screws
- :: Heavy duty pipe clamp
- :: Accepts 2 - 10 gauge wire

Ref: UL File#: **E 2 0 7 8 1 6****HEAVY-DUTY BRONZE PIPE CLAMPS**

ITEM NO.	TRADE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
K-13	1/2" ~ 1"	2-10	-	125



bronze

**FEATURES:**

- :: Trade size: available in 1-1/4" ~ 2" pipe
- :: Pipe clamp with adapter
- :: Galvanized flat head steel screws

Ref: UL File#: **E 2 0 7 8 1 6****BRONZE PIPE CLAMPS WITH ADAPTER**

ITEM NO.	TRADE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
K-24SHBA	1-1/4" ~ 2"	8-4/0	-	35

C24



Ground Fittings





bronze

FEATURES:

- :: Trade size: available from 1/2" ~ 1"
- :: Galvanized flat head steel screws
- :: Bare ground clamp with rigid conduit adapter
- :: With ground lug

APPLICATION:

- :: Used to join water pipe to threaded rigid conduit

Ref: UL File#: **E 2 0 7 8 1 6****BRONZE GROUND CLAMPS WITH RIGID CONDUIT ADAPTER**

ITEM NO.	TRADE SIZE	HUB SIZE	WIRE SIZE	STD. PKG.	
				INNER	MASTER
K-11LHB12	1/2" ~ 1"	1/2"	10-6	-	40
K-11LHB2	1/2" ~ 1"	3/4"	8-3/0	-	35
K-11LHB3	1/2" ~ 1"	1"	8-3/0	-	30



bronze

FEATURES:

- :: Trade size: available from 1/2" ~ 1"
- :: Galvanized flat head steel screws
- :: Bare ground clamp with rigid conduit adapter and flexible cooper strap

Ref: UL File#: **E 2 0 7 8 1 6****BRONZE GROUND CLAMPS WITH RIGID CONDUIT ADAPTER & FLEXIBLE COPPER STRAP**

ITEM NO.	WATER PIPE SIZE	HUB SIZE	WIRE SIZE	STD. PKG.	
				INNER	MASTER
K-11CS LHB1	1/2" ~ 1"	1/2"	6-10	-	35
K-11CS LHB2	1/2" ~ 1"	3/4"	8-3/0	-	30
K-11CS LHB3	1/2" ~ 1"	1"	8-3/0	-	25



bronze

FEATURES:

- :: Trade size: available from 3/8" to 3/4"
- :: Bronze hex head screw, rated for direct burial
- :: Up to 1/0 stranded wire

APPLICATION:

- :: Used join bare copper ground wire to ground rod

Ref: UL File#: **E 2 0 7 8 1 6****BRONZE DIRECT BURIAL GROUND ROD CLAMP**

ITEM NO.	TRADE SIZE	GROUND ROD SIZE	STD. PKG.	
			INNER	MASTER
S-10	3/8"	3/8"	-	500
S-11	1/2"	1/2"	-	500
S-22	5/8"	5/8"	-	450
S-33	3/4"	3/4"	-	300



C25

Ground Fittings



**EXCLUSIVE
PATENTED
TECHNOLOGY**



bronze

**IMPROVED
MODEL**



Westgate's new feed-through armored ground clamp saves time, labor and material by allowing you to feed armored ground through the clamp and onto the next connection. Ground wire does not get cut! Cut only the outer armored jacket and insert ground wire into center lug. Secure each side of the armored jacket into the strain reliefs located on each side of the clamp.

FEATURES:

- :: Rated for use with ground rods and rebar, plus steel, iron and copper pipes.
- :: Pipe range: 1/2" ~ 3/4"
- :: Wire Range: #14 AWG through #4
- :: Ideal for residential, commercial and industrial applications
- :: Armored ground clamps are used to bonding armored cable to rebar, ground rods, copper or steel water pipes.
- :: All fittings are UL listed and manufactured from high strength bronze alloy known for it's high conductivity.
- :: Meets NEC (National Electric Code) requirements.

Ref: **UL** File#: **E 3 1 7 8 1 5**

CUT INSTALLATION TIME BY 1/3!

No opening



(OLD MODEL)



Feed through opening

FEED-THROUGH ARMORED GROUND CLAMP

ITEM NO.	PIPE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
MVP99	1/2" ~ 1"	4-6-8	-	125

C26



Ground Fittings

**EXCLUSIVE
PATENTED
TECHNOLOGY**



bronze



Saves time, labor and material by feeding armored ground from any direction. Landing lug rotates 90–180–270 degrees. Ideal for tight spaces or short runs that make changing direction hard! Reduce cable runs, save time and simplify installation. Rated for use with ground rods and rebar, plus steel, iron and copper pipes.

FEATURES:

- :: Pipe range: 1/2" ~ 3/4"
- :: Wire Range: #14 AWG through #4
- :: Ideal for residential, commercial, and industrial applications
- :: Armored ground clamps are used to bonding armored cable to rebar, ground rods, copper or steel water pipes.
- :: All fittings are UL listed and manufactured from high strength bronze alloy known for it's high conductivity.
- :: Meets NEC (National Electric Code) requirements.

Ref: **UL** File#: **E 3 1 7 8 1 5**

DIRECTIONAL ARMORED GROUND CLAMP

ITEM NO.	PIPE SIZE	WIRE SIZE	STD. PKG.	
			INNER	MASTER
MVP98	1/2" ~ 1"	4-6-8	-	115



C27

Straps

**FEATURES:**

- :: Trade size: available from ½" to 4" EMT
- :: Stamped steel with galvanized finish
- :: One hole EMT straps
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to mount EMT conduit to flat surfaces

Ref: UL File#: **E 3 3 1 6 4 2****ONE-HOLE STEEL EMT STRAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
62021	½"	100	1000
62022	¾"	100	1000
62023	1"	50	500
62024	1-¼"	50	500
62025	1-½"	-	50
62026	2"	-	20
62027	2-½"	-	25
62028	3"	-	25
62030	3-½"	-	10

**FEATURES:**

- :: Trade size: available from ½" to 2" EMT
- :: Stamped steel with galvanized finish
- :: Two hole EMT straps
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: UL File#: **E 3 1 5 2 5 6****TWO-HOLE STEEL EMT STRAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
62121	½"	100	1000
62122	¾"	100	500
62123	1"	50	500
62124	1-¼"	20	100
62125	1-½"	-	50
62126	2"	-	20



**FEATURES:**

- :: Trade size: available from ½" to 4"
- :: Stamped steel with galvanized finish
- :: One hole rigid straps
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to mount rigid conduit to flat surfaces

Ref: **UL** File#: **E 3 3 1 6 4 2****ONE-HOLE STEEL RIGID STRAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
62001	½"	50	500
62002	¾"	50	500
62003	1"	25	250
62004	1-¼"	20	100
62005	1-½"	10	100
62006	2"	-	50
62007	2-½"	-	25
62008	3"	-	25
62010	4"	-	10

**FEATURES:**

- :: Trade size: available from ½" to 4"
- :: Stamped steel with galvanized finish
- :: Two hole rigid pipe straps
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 1 5 2 5 6****TWO-HOLE STEEL RIGID STRAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
62201	½"	50	500
62202	¾"	50	500
62203	1"	25	250
62204	1-¼"	20	100
62205	1-½"	10	100
62206	2"	-	50
62207*	2-½"	-	25
62208*	3"	-	25
62209*	3-½"	-	10
62210*	4"	-	10

C28



Straps



**FEATURES:**

- :: Trade size: available in 3/8" flex, BX, AC cables
- :: Stamped steel with galvanized finish
- :: One hole cable straps
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 3 1 6 4 2****STEEL MC/BX CABLE STRAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
WS1-38	3/8"	200	2000

**FEATURES:**

- :: Trade size: available from 1/2" to 2"
- :: Two hole straps for flat service entrance cable
- :: Stamped steel with galvanized finish
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to secure service entrance cable to flat surface.

Ref: **UL** File#: **E 3 3 1 6 4 2****TWO-HOLE STEEL SERVICE ENTRANCE CABLE STRAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
C2S-50	1/2"	-	20
C2S-75	3/4"	-	20
C2S-100	1"	-	20
C2S-200	2"	-	20

**FEATURES:**

- :: Trade size: available from 1/2" to 1"
- :: Stamped steel with galvanized finish
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Used to secure EMT conduit to flat wood surface.

Ref: **UL** File#: **E 3 3 1 6 4 2****STEEL EMT NAIL STRAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SN-50	1/2"	200	2000
SN-50/75	3/4"	100	1000
SN-100	1"	100	1000



**FEATURES:**

- :: Trade size: available from 1/2" to 4"
- :: Stamped steel with galvanized finish
- :: Conduit pipe hangers with bolt & nut included
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

APPLICATION:

- :: Conduit hangers are used in both wet and dry locations to support Rigid, IMC and EMT conduits from ceilings and horizontal surfaces

Ref: **UL** File#: **E 3 3 1 6 4 2****STEEL CONDUIT PIPE HANGERS WITH BOLT**

ITEM NO.	TRADE SIZE	PIPE SIZE	STD. PKG.	
			INNER	MASTER
UNI-50B	1/2"	1/2"	50	100
UNI-75B	3/4"	3/4"	50	100
UNI-100B	1"	1"	25	100
UNI-105B	1-1/4"	-	20	100
UNI-125B	1-1/2"	1-1/4"	10	100
UNI-150B	-	1-1/2"	-	100
UNI-200B	2"	2"	-	50
UNI-250B	2-1/2"	2-1/2"	-	50
UNI-300B	3"	3"	-	25
UNI-350B	3-1/2"	3-1/2"	-	25
UNI-400B	4"	4"	-	25

**FEATURES:**

- :: Trade size: available in 1" or 2"
- :: Single hex head set screw
- :: Two threaded holes, one side one bottom
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 3 1 6 4 2****STEEL BEAM CLAMPS**

ITEM NO.	TRADE SIZE	TAP SIZE	STD. PKG.	
			INNER	MASTER
BCS-25	1"	1/4—20	50	500
BCS-38	2"	3/8—16	-	50

C30

Straps



C31



Conduit Nipples

zinc
die-cast**FEATURES:**

- :: Trade size: available from 1/2" to 2"
- :: Die cast aluminum

Ref: **UL** File#: **E 3 0 7 8 4 3****DIE-CAST SHORT CONDUIT CHASE NIPPLES**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
CHN-50	1/2"	-	100
CHN-75	3/4"	-	100
CHN-100	1"	-	50
CHN-125	1-1/4"	-	25
CHN-150	1-1/2"	-	25
CHN-200	2"	-	15

zinc
die-cast**FEATURE:**

- :: Trade size: available from 1/2" to 2"

Ref: **UL** File#: **E 3 0 7 8 4 3****DIE-CAST OFF SET NIPPLES**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
NO-50	1/2"	-	25
NO-75	3/4"	-	20
NO-100	1"	-	10
NO-125	1-1/4"	-	5
NO-150	1-1/2"	-	5
NO-200	2"	-	3



die-cast
aluminum**FEATURES:**

- :: Trade size: available from ½" to 4" Rigid
- :: Copper-free aluminum with steel bracket

APPLICATION:

- :: Used as entrance cap for rigid or IMC conduit

Ref: **UL** File#: **E 2 0 7 0 3 9****DIE-CAST CLAMP-ON SERVICE
ENTRANCE CAPS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
WC2-50	½"	-	100
WC2-75	¾"	-	100
WC2-100	1"	-	100
WC2-125	1-¼"	-	60
WC2-150	1-½"	-	20
WC2-200	2"	-	5
WC2-250	2-½"	-	1
WC2-300	3"	-	1
WC2-350	3-½"	-	1
WC2-400	4"	-	1



C32



Service Entrance



C33

Hanging Devices

**FEATURES:**

- :: Available in 10 or 12 gauge
- :: Weight rating: 10 gauge (35 lbs) - 12 gauge (25 lbs)
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

STEEL JACK CHAIN 100 FT.

ITEM NO.	GAUGE	STD. PKG.	
		INNER	MASTER
CH-1010	10	-	100
CH-1212	12	-	100

**FEATURES:**

- :: Trade size: available from 1/2" to 2"
- :: Die cast aluminum
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

STEEL FIXTURE HANGERS

ITEM NO.	GAUGE	MOUNT	STD. PKG.	
			INNER	MASTER
FH-E	10GA	TOP-MOUNT	100	500
FH-S	10GA	SIDE-MOUNT	100	500

**FEATURES:**

- :: Trade size: available from 1/4" wood screw to 3" long
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

STEEL FLAT HANGER SCREW WITH SINGLE HOLE

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
H-SCREW	1/4" x 3"	100	500

**FEATURES:**

- :: For 10-2, 12-2, 12-3, 14-2, 14-3 Romex
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E331642****STEEL CABLE STAPLES**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
YL25-100	10~14	100	5000
YL25-500	10~14	500	5000
YL25-B	10~14	-	5000



**FEATURES:**

- :: Ground screw available with 7 12-gauge copper ground wire (90C)
- :: 10-32 x 3/8" Steel ground screw

Ref: **UL** File#: **E 3 2 0 4 8 7****SOLID COPPER GREEN PIGTAILS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
GS-7	7"	100	1000

**FEATURES:**

- :: 10-32 x 3/8" steel ground screw
- :: Material: steel
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

STEEL GROUND SCREWS

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
GS-1032	10-32 x 3/8"	100	1000

**FEATURE:**

- :: Trade size: available from 1/2" - 2"
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

Ref: **UL** File#: **E 3 4 0 4 3 3****STEEL KNOCKOUT SEALS**

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
SKO-50	1/2"	-	1607
SKO-75	3/4"	-	1200
SKO-100	1"	-	1000
SKO-125	1-1/4"	-	500
SKO-150	1-1/2"	-	500
SKO-200	2"	-	250

C34



Box Accessories



C35

Fish Tapes



0305FAH

No rust - No corrosion - No kinks - Non conductive

- This fiberglass fish tape is perfect for general conduit fishing and wire pulling applications
- Lightweight with easy to use winder unit contains a highly visible, non-conductive fish tape is .15" diameter with protective outer nylon jacket and .08" solid fiberglass core

FEATURES:

- :: Made from flexible nylon coated fiberglass
- :: Equipped with durable polycarbonate housing and slide handle
- :: Flexible swivel leader included.

FIBERGLASS FISH TAPES

CAT NO.	TAPE WIDTH	TAPE THICKNESS	TAPE LENGTH	WINDER CASE (DIA.)	COLOR	STD. PKG.
0305FAH	5/32"	1/16"	50 FEET	10"	RED	5
0310FAH	5/32"	1/16"	100 FEET	10"	RED	5
0315FAH	5/32"	1/16"	150 FEET	10"	RED	5



0325L

ACCESSORIES

CAT NO.	DESCRIPTION	STD. PKG.
0325L	FLEXIBLE, SWIVEL LEAD GUIDE FOR 3.2mm X 1.6mm FIBERGLASS FISH TAPES	1



Steel fish tapes made from durable spring steel with built-in pulling tip



0305A

0310AA
0320AA

STEEL FISH TAPES

CAT NO.	TAPE WIDTH	TAPE THICKNESS	TAPE LENGTH	WINDER CASE (DIA.)	COLOR	STD. PKG.
0305A	1/8"	1/16"	50 FEET	8-1/3"	RED	12
0310AA	1/8"	1/16"	100 FEET	12"	RED	12
0320AA	1/8"	1/16"	150 FEET	12"	RED	6

C36



Fish Tapes





combination devices



wallplates



lampholders



receptacles



grip



switches



timers



dimmers

motion sensors



wiring devices

Westgate stocks a wide variety of wiring devices that offer "Best-In-Class" functionality as well as convenience, for any lighting control application. From simple to advanced state-of-the-art design, these products offer a combination of a low cost, but with powerful features for maximum energy savings and user satisfaction. Also included in this section are wallplates and lampholders in several different materials.



FEATURES:

- :: Passive infrared technology (PIR)
- :: Replaces standard single pole switch
- :: LED indicator light for easy locating in darkened rooms
- :: Simple color coded wiring diagram
- :: Adjustable time delay from 1 to 30mins
- :: Works with all lighting loads and fans
- :: Compatible with incandescent, fluorescent, magnetic low-voltage (MLV) and electronic low-voltage (ELV)
- :: Neutral required (except YM2106)
- :: Manual-ON/OFF at any time

APPLICATIONS:

- :: Decorative style occupancy sensors automatically turn the light on when a person enters an area and turns the light off when the area is vacant.

Ref: UL File#: **E307893**



YM2106
YM2106-T



YM2120



YM2108-T



YM2301

COMMERCIAL DUAL RATED - VACANCY & OCCUPANCY SENSORS | 120~277VAC, 60Hz

CAT NO.	COVERAGE AREA	SPECIAL FEATURE	OPERATION	COLOR	STD. PKG.	
					INNER	MASTER
YM2106	180° 24 FT. X 30 FT. (720 FT.)	NO NEUTRAL, ADJUSTABLE TIME DELAY 1-30 MINS	800W @120V, 1200W @277V, NO MIN	WHITE	10	50
YM2106-T	180° 24 FT. X 30 FT. (720 FT.)	3-WAY, NO NEUTRAL, ADJUSTABLE TIME DELAY 1-30 MINS	800W @120V, 1200W @277V, NO MIN	WHITE	10	50
YM2120	180° 24 FT. X 30 FT. (720 FT.)	DUAL SENSOR, 2-POLE TIME & LIGHT SENSITIVITY, LED INDICATOR	600W @120V, 1000W @277V, NO MIN	WHITE	10	50
YM2108-T	180° 24 FT. X 30 FT. (720 FT.)	3-WAY, TIME & LIGHT SENSITIVITY ADJUSTMENT	600W @120V, 1000W @277V, NO MIN	WHITE	10	50

CEILING PIR SENSOR | 120~277VAC, 60Hz

CAT NO.	COVERAGE AREA	SPECIAL FEATURE	OPERATION	COLOR	STD. PKG.	
					INNER	MASTER
YM2301	360° 24 FT. X 30 FT. (720 FT.)	ADJUSTABLE TIME DELAY 1-30 MINS	800W @120V, 1200W @277V, NO MIN	WHITE	10	50

D1

Automatic Motion Sensors





YM185



YMSN180



YM181-IV

YM2101
(120-277VAC)**FEATURES:**

- :: Residential grade switches
- :: Manual-on, motion controlled off
- :: Replaces standard single pole or 3-way switch
- :: LED indicator light for improved visibility (except YM181)
- :: Adjustable time delay from 1 minute to 30 minutes
- :: Works with all types loads: incandescent, fluorescent / low voltage (electronic or magnetic) and bathroom fans
- :: Neutral required

APPLICATION:

- :: Decorative style vacancy sensors are used to automatically turn lights off after a person leaves an area. Title-24 approved sensors must have manual on with motion sensor controlled off when room is vacant. These sensors are ideal for use in bathrooms, garages, laundry or utility rooms to save energy and extend lamp life.
- :: Commercial decorative style sensors function as an occupancy or vacancy sensor with a simple flip of the switch.

Ref: UL File#: **E307893**

D2



Automatic Motion Sensors

VACANCY SENSORS | 120VAC, 60Hz

CAT NO.	COVERAGE AREA	SPECIAL FEATURE	OPERATION	COLOR	STD. PKG.	
					INNER	MASTER
YM185-W YM185-IV	180° 24 FT. X 25 FT. (600 FT.),	ADJUSTABLE TIME DELAY 1-30 MINS	0-600W SINGLE POLE	WHITE IVORY	10	50
YMSN180-W YMSN180-IV	180° 24 FT. X 25 FT. (600 FT.)	VACANCY ONLY	0-600W SINGLE POLE	WHITE IVORY	10	50
YM181-W YM181-IV	180° 24 FT. X 25 FT. (600 FT.)	ADJUSTABLE TIME DELAY 1-30 MINS	0-600W SINGLE POLE	WHITE IVORY	10	50
YM2101-W	180° 24 FT. X 30 FT. (720 FT.)	COMMERCIAL , ADJUSTABLE TIME DELAY 1-30 MINS	800W @120V, 1200W @277V, NO MIN	WHITE	10	50



YM2105

APPLICATION:

- :: Decorative style occupancy sensors automatically turn lights on when a person enters an area and turns the light off when the area is vacant.

OCCUPANCY SENSORS | 120VAC, 60Hz

CAT NO.	COVERAGE AREA	SPECIAL FEATURE	OPERATION	COLOR	STD. PKG.	
					INNER	MASTER
YM2105-W YM2105-IV	180° 24 FT. X 25 FT. (600 FT.)	TIME & LIGHT SENSITIVITY ADJUSTMENT	30-500W SINGLE POLE	WHITE IVORY	10	50



D3

Timers



FEATURES:

- :: Automatic or manual operation
- :: Push the main button to switch load ON or OFF at any time
- :: Program up to 18 ON - OFF settings per 7 day week
- :: Easy set digital time clock
- :: Random (RND) feature
- :: Daylight saving time feature (DST)
- :: Delete and recover any program (RCL)
- :: Large digital LCD display
- :: Standard decorator style wall plate included
- :: Built-in memory holds settings indefinitely without power

Ref: **UL** File#: **E 3 1 7 5 8 9**



HET01



HET01-3R

7-DAY HEAVY DUTY DIGITAL IN-WALL TIMERS | 120VAC, 60Hz

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
HET01-W	SINGLE POLE, 7-DAY HEAVY DUTY DIGITAL IN-WALL TIMER	RESISTIVE: 15A, 1800W TUNGSTEN: 1200W MOTOR LOAD: 1/2HP	WHITE	10	40
HET01-3R-W	THREE-WAY, 7-DAY HEAVY DUTY DIGITAL IN-WALL TIMER	RESISTIVE: 15A, 1800W TUNGSTEN: 1200W MOTOR LOAD: 1/2HP	WHITE	10	40





HMT01

FEATURES:

- :: Mounts in a standard single gang junction box
- :: Up to 35 ON/OFF settings per day
- :: Auto ON with manual OFF override switch
- :: Maximum ON/OFF time: 23 hours, 40 Mins.
- Minimum ON/OFF time: 20 Mins
- :: Dual timer allows control of two separate circuits with different time schedules
- :: 72 Integrated trippers
- :: Operating temperatures: 0°C to + 40°C

Ref: **UL** File#: **E 3 1 7 5 8 9****24-HOUR MECHANICAL IN-WALL TIMER | 120VAC, 60Hz**

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
HMT01-W	24-HOUR HEAVY DUTY MECHANICAL IN-WALL TIMERSWITCH	RESISTIVE: 15A, 1800W TUNGSTEN: 1000W MOTOR LOAD: 1/2HP	WHITE	10	40



HET06

**FEATURES:**

- :: Six-button preset timer switch
- :: Replaces existing switch, single pole & 3-way rated
- :: Rated for all load types
- :: Ideal for bathroom fans

Ref: **UL** File#: **E 3 1 7 5 8 9****COUNT DOWN TIMER WITH 6-PRESET BUTTONS | 120VAC, 60Hz**

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
HET06-W	SINGLE POLE / THREE-WAY COUNT DOWN TIMER WITH 6-PRESET BUTTONS SEPARATE ON/OFF SWITCH	RESISTIVE: 15A, 1800W TUNGSTEN: 1200W MOTOR LOAD: 1/2HP	WHITE	10	40



D5



Dimmers



50321

accessories
includedwallplates
included

50301



LUXDM600-15L

FEATURES:

- :: Tough impact-resistant thermoplastic housing
- :: Full range dimming down to 3%
- :: 50301 model dual rated for light or fan speed control
- :: Extruded aluminum heat sink
- :: Smooth action slide control for easy precise operation
- :: Broad product offering to meet a wide variety of applications
- :: 3-way control uses a standard three-way switch at second switch location

Ref: UL File#: **E312733****SLIDE DIMMERS | 120VAC, 60Hz**

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
50321-W 50321-I	SINGLE POLE & THREE-WAY PRESET SLIDE DIMMER, SEPARATE ON/OFF SWITCH, WITH LED INDICATOR LIGHT	700W	WHITE IVORY	10	60
50301-W 50301-I	SINGLE POLE & THREE-WAY SLIDE DIMMER WITH LED INDICATOR LIGHT, FAN RATED 2.5A	700W	WHITE IVORY	10	60
LUXDM600-15L-W LUXDM600-15L-IV LUXDM600-15L-AL	SQUARE PUSH SWITCH, WITH LED INDICATOR	600W	WHITE IVORY ALMOND	10	60



DMF-3

FEATURES:

- :: Fluid sliding motion allows for precise adjustment of light levels with minimum effort
- :: Full range dimming down to 3%
- :: Preset dimmer with full size ON/OFF switch
- :: Broad product offering to meet a wide variety of applications
- :: Rated for single-pole, or 3-way control
- :: 3-way control uses a standard three-way switch at second switch location

Ref: UL File#: **E317589****DECORATOR SLIDE DIMMERS | 120VAC, 60Hz**

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
DMF-3	THREE-WAY DECORATOR SWITCH WITH LED INDICATOR LIGHT	600VA	LIGHT WHITE	10	60




accessories
included

wallplates
included

FEATURES:

- :: Tough impact-resistant thermoplastic housing
- :: Fluid sliding motion allows for precise adjustment of fan speed with minimum effort
- :: 17002-NS is a "Start on High" dedicated fan speed control
- :: 17001 independent fan speed & light control

Ref: **UL** File#: **E313535**


17001



17002



17002-NS

FAN SPEED CONTROLS | 120VAC, 60Hz

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
17001-W 17001-I	DUAL FULL RANGE DIMMER / FAN SPEED CONTROL 300W LIGHT / 2.5 AMP FAN	2.5A	WHITE IVORY	10	60
17002-W 17002-I	FULL RANGE FAN SPEED CONTROL WITH INDEPENDENT SWITCH	2.5A	WHITE IVORY	10	60
17002-NS-W	FULL RANGE FAN SPEED CONTROL, SLIDE ON- SLIDE OFF, WITH LED INDICATOR LIGHT	2.5A	WHITE	10	60

D6



Dimmers



D7

Switches



YQDS115-Q



YQDS120-Q



YQDS315-Q



YQDS415-Q

FEATURES:

- :: Tough impact-resistant thermoplastic housing
- :: UL Listed, with ground screw installed
- :: Color coded terminal screws with universal Phillips, slotted and torx head design
- :: 15 amp switches include side wire screw terminals and push-in "quick wire" terminals (14ga only)
- :: Available in single-pole, 3-way and 4-way switch configurations
- :: Available in white, ivory and almond
- :: Captive tang screws with durable zinc plating

Ref: **UL** File#: **E237552****DECORATIVE SWITCHES | 120~277VAC**

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
YQDS115-Q-W	SINGLE POLE	15A, 120V-277V AC	WHITE	10	200
YQDS115-Q-I	SINGLE POLE	15A, 120V-277V AC	IVORY	10	200
YQDS115-Q-AL	SINGLE POLE	15A, 120V-277V AC	ALMOND	10	200
YQDS120-W	SINGLE POLE	20A, 120V-277V AC	WHITE	10	200
YQDS120-I	SINGLE POLE	20A, 120V-277V AC	IVORY	10	200
YQDS315-AL	THREE-WAY	15A, 120V-277V AC	ALMOND	10	200
YQDS315-Q-W	THREE-WAY	15A, 120V-277V AC	WHITE	10	200
YQDS315-Q-I	THREE-WAY	15A, 120V-277V AC	IVORY	10	200
YQDS415-W	FOUR-WAY	15A, 120V-277V AC	WHITE	10	200
YQDS415-I	FOUR-WAY	15A, 120V-277V AC	IVORY	10	200
YQDS415-AL	FOUR-WAY	15A, 120V-277V AC	ALMOND	10	200



**FEATURES:**

- :: Tough impact-resistant thermoplastic housing
- :: UL Listed, with ground screw installed
- :: Color coded terminal screws with universal Phillips, slotted, and torx head design
- :: 15 amp switches include side wire screw terminals and push-in "quick wire" terminals (14ga only)
- :: Captive tang screws with durable zinc plating

APPLICATION:

- :: For switching all standard electrical loads

Ref: **UL** File#: **E 237552**

D8

Switches

TOGGLE SWITCHES | 120~277VAC

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
YQTS115-W	SINGLE POLE	15A, 120V-277V AC	WHITE	10	200
YQTS115-I	SINGLE POLE	15A, 120V-277V AC	IVORY	10	200
YQTS115-A	SINGLE POLE	15A, 120V-277V AC	ALMOND	10	200
YQTS115-C-W	SINGLE POLE	15A, 120V-277V AC	WHITE	10	200
YQTS115-C-I	SINGLE POLE	15A, 120V-277V AC	IVORY	10	200
YQTS115-C-A	SINGLE POLE	15A, 120V-277V AC	ALMOND	10	200
YQTS120-W	SINGLE POLE	20A, 120V-277V AC	WHITE	10	200
YQTS120-I	SINGLE POLE	20A, 120V-277V AC	IVORY	10	200
YQTS120-A	SINGLE POLE	20A, 120V-277V AC	ALMOND	10	200
YQTS315-W	THREE-WAY	15A, 120V-277V AC	WHITE	10	200
YQTS315-I	THREE-WAY	15A, 120V-277V AC	IVORY	10	200
YQTS315-A	THREE-WAY	15A, 120V-277V AC	ALMOND	10	200
YQTS415-W	FOUR-WAY	15A, 120V-277V AC	WHITE	10	200



D9



Receptacles



YQ115R



YQ115RH



YQ120R



YQ120RH

FEATURES:

- :: Tough impact-resistant thermoplastic housing
- :: UL Listed, with ground screw installed
- :: Color coded terminal screws with universal Phillips, slotted and torx head design
- :: 15 amp devices include side wire screw terminals and push-in "quick wire" terminals (14ga only)
- :: Captive tang screws with durable zinc plating

APPLICATION:

- :: Single receptacle for dedicated devices or where required by code

Ref: **UL** File#: **E 237396**

SINGLE RECEPTACLES | 125VAC & 250VAC, 60Hz

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
YQ115R-W	SINGLE RECEPTACLE	15A / 125V	WHITE	10	200
YQ115R-I	SINGLE RECEPTACLE	15A / 125V	IVORY	10	200
YQ115RH-W	SINGLE RECEPTACLE	15A / 250V	WHITE	10	200
YQ115RH-I	SINGLE RECEPTACLE	15A / 250V	IVORY	10	200
YQ120R-W	SINGLE RECEPTACLE	20A / 125V	WHITE	10	200
YQ120R-I	SINGLE RECEPTACLE	20A / 125V	IVORY	10	200
YQ120RH-W	SINGLE RECEPTACLE	20A / 250V	WHITE	10	200
YQ120RH-I	SINGLE RECEPTACLE	20A / 250V	IVORY	10	200





YQ15RS-TR



YQ15R-S



YQ15R-C



YQ20R-C



YQ20RH-HG

FEATURES:

- :: Tough impact-resistant thermoplastic construction
- :: UL Listed, with ground screw included
- :: Self-grounding
- :: Color coded terminal screws with universal Phillips, slotted and torx head design
- :: 15 amp devices include side wire screw terminals and push-in "quick wire" terminals (14ga only)
- :: Captive tang screws with durable zinc plating

Ref: UL File#: **E 237396****DUPLEX RECEPTACLES | 125VAC, 60Hz**

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
YQ15R-S-W	RESIDENTIAL GRADE STANDARD DUPLEX RECEPTACLE	15A/125V	WHITE	10	200
YQ15R-S-I	RESIDENTIAL GRADE STANDARD DUPLEX RECEPTACLE	15A/125V	IVORY	10	200
YQ15R-S-A	RESIDENTIAL GRADE STANDARD DUPLEX RECEPTACLE	15A/125V	ALMOND	10	200
YQ15RS-TR-W	RESIDENTIAL GRADE STANDARD DUPLEX RECEPTACLE TAMPER RESISTANT SELF-GROUNDING	15A/125V	WHITE	10	200
YQ15RS-TR-I	RESIDENTIAL GRADE STANDARD DUPLEX RECEPTACLE, TAMPER RESISTANT SELF-GROUNDING	15A/125V	IVORY	10	200
YQ15R-C-W	COMMERCIAL GRADE DUPLEX RECEPTACLE	15A/125V	WHITE	10	200
YQ15R-C-I	COMMERCIAL GRADE DUPLEX RECEPTACLE	15A/125V	IVORY	10	200
YQ15R-C-A	COMMERCIAL GRADE DUPLEX RECEPTACLE	15A/125V	ALMOND	10	200
YQ20R-C-W	COMMERCIAL GRADE DUPLEX RECEPTACLE	15A/125V	WHITE	10	200
YQ20R-C-I	COMMERCIAL GRADE DUPLEX RECEPTACLE	20A/125V	IVORY	10	200
YQ20RH-HG-W	HOSPITAL GRADE DUPLEX RECEPTACLE	20A/125V	WHITE	10	200
YQ20RH-HG-I	HOSPITAL GRADE DUPLEX RECEPTACLE	20A/125V	IVORY	10	200

D10



Receptacles



D11

Receptacles



YQ15RS-D-TR

FEATURES:

- :: Tough tamper-proof thermoplastic housing
- :: UL Listed with ground screw installed
- :: Self-grounding
- :: Color coded terminal screws with universal Phillips, slotted and torx head design
- :: 15 amp devices include side wire screw terminals and push-in "quick wire" terminals (14ga only)
- :: Captive tang screws with durable zinc plating

Ref: **UL** File#: **E 237396**

YQ15R-D-S



YQ20RS-D-TR



YQ20R-D-S

DECORATIVE RECEPTACLES | 125VAC, 60Hz

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
YQ15R-D-S-W	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	15A / 125V	WHITE	10	200
YQ15R-D-S-I	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	15A / 125V	IVORY	10	200
YQ15R-D-S-AL	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	15A / 125V	ALMOND	10	200
YQ15RS-D-TR-W	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	15A / 125V	WHITE	10	200
YQ15RS-D-TR-I	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	15A / 125V	IVORY	10	200
YQ20R-D-S-W	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	20A / 125V	WHITE	10	200
YQ20R-D-S-I	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	20A / 125V	IVORY	10	200
YQ20R-D-S-A	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	20A / 125V	ALMOND	10	200
YQ20RS-D-TR-W	RESIDENTIAL GRADE DECORA DUPLEX RECEPTACLE, 2-POLE, 3-WIRE GROUNDING	20A / 125V	WHITE	10	200





YQR30-3



YQR30-4



YQR50-4



YQR230-4

FEATURES:

- :: Tough impact-resistant thermoplastic housing
- :: Heavy gauge steel mounting strap zinc-plated for corrosion resistance
- :: Receptacle for use with copper wire
- :: Easy-to-wire terminals accept to No.4–No.10 AWG conductors
- :: Mounting screws included
- :: Reinforced mounting strap
- :: UL Listed

APPLICATION:

- :: Ideal for 30 or 50 amp washer, dryer and range installations

Ref: **UL** File#: **E 2 3 7 3 9 6**

D12



Receptacles

APPLIANCE DRYER/RANGE RECEPTACLES | 125~250VAC

CAT NO.	DESCRIPTION	GANG	RATING	COLOR	STD. PKG.	
					INNER	MASTER
YQR30-3	THREE-WIRE/ THREE POLE DRYER RECEPTACLE	1	30A, 125V / 250V	BLACK	10	200
YQR30-4	FOUR WIRE/ THREE POLE DRYER RECEPTACLE	1	30A, 125V / 250V	BLACK	10	200
YQR50-4	FOUR WIRE/ THREE POLE RANGE RECEPTACLE	1	50A, 125V / 250V	BLACK	10	200
YQR230-4	FOUR WIRE/ THREE POLE DRYER RECEPTACLE	2	30A, 125V / 250V	BLACK	10	200



D13



Decorative Combination Devices



YQ5634



YQ5625



YQ3DS-W

FEATURES:

- :: Tough impact-resistant thermoplastic construction
- :: UL Listed, with ground screw installed
- :: Color coded terminal screws with universal Phillips, slotted and torx head design
- :: 15 amp devices include side wire screw terminals and push-in "quick wire" terminals (14ga only)
- :: Captive tang screws with durable zinc plating

APPLICATION:

- :: Dual purpose combination devices

Ref: **UL** File#: **E 237552**

DECORATIVE COMBINATION DEVICES | 120VAC, 60Hz

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
YQ5634-W	DECORATOR COMBINATION DEVICES DOUBLE ROCKER SWITCHES, SIDE-WIRED	15A / 120V-227V	WHITE	10	200
YQ5634-IV	DECORATOR COMBINATION DEVICES DOUBLE ROCKER SWITCHES, SIDE-WIRED	15A / 120V-227V	IVORY	10	200
YQ5625-W	DECORATOR COMBINATION DEVICES SINGLE POLE SWITCH/RECEPTACLE	15A / 120V	WHITE	10	200
YQ3DS-W	DECORATOR COMBINATION DEVICES TRIPLE ROCKER SWITCHES, PUSH IN	15A / 120V-277V	WHITE	10	200
YQ3DS-IV	DECORATOR COMBINATION DEVICES TRIPLE ROCKER SWITCHES, PUSH IN	15A / 120V-277V	IVORY	10	200





YQTS215-W



YQTS-R15-W



YQ5226

FEATURES:

- :: Tough impact-resistant thermoplastic construction
- :: UL Listed, with ground screw installed
- :: Color coded terminal screws with universal Phillips, slotted and torx head design
- :: 15 amp devices include side wire screw terminals and push-in "quick wire" terminals (14ga only)
- :: Captive tang screws with durable zinc plating

APPLICATION:

- :: Dual purpose devices conserves space and provides greater versatility

Ref: **UL** File#: **E 2 3 7 5 5 2**

D14



Combination Devices

COMBINATION DEVICES | 120VAC, 60Hz

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
YQTS215-W	TWO STACKED SINGLE-POLE TOGGLE SWITCHES WITH GROUND SCREW	20A / 120V	WHITE	10	200
YQTS215-I	TWO STACKED SINGLE-POLE TOGGLE SWITCHES WITH GROUND SCREW	20A / 120V	IVORY	10	200
YQTS-R15-W	SINGLE-POLE, 15 AMP TOGGLE SWITCH & 125V RECEPTACLE, WITH GROUND SCREW	15A / 120V	WHITE	10	200
YQ5226-W	SINGLE-POLE 15 AMP SWITCH WITH LED PILOT LIGHT	15A / 120V	WHITE	10	200



FEATURES:

- :: Screw-less snap in design for ultra clean look
- :: Fits all decorative devices
- :: Two-piece mounting kit allows for easy retrofit to any installation
- :: High-impact resistance LEXAN 24i construction is virtually unbreakable.
- :: Smooth finish is easy cleaning and maintenance, dishwasher safe
- :: Captive mounting screws held in place for quick and easy installation
- :: UL listed

APPLICATION:

- :: Perfect for high end residential or commercial applications where appearance and durability are desired.

Ref: **UL** File#: **E 2 3 6 9 3 8**


S18831



S18832



S18833

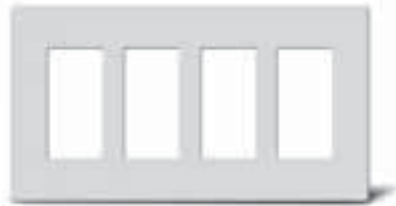

S18834



S18835

DÉCORA SCREWLESS WALLPLATES

CAT NO.	DESCRIPTION	GANG	COLOR	STD. PKG.	
				INNER	MASTER
S18831-W	SCREWLESS DECORA /GFCI WALLPLATES	1	WHITE	10	100
S18831-I	SCREWLESS DECORA /GFCI WALLPLATES	1	IVORY	10	100
S18832-W	SCREWLESS DECORA /GFCI WALLPLATES	2	WHITE	10	100
S18832-I	SCREWLESS DECORA /GFCI WALLPLATES	2	IVORY	10	100
S18833-W	SCREWLESS DECORA /GFCI WALLPLATES	3	WHITE	10	100
S18834-W	SCREWLESS DECORA /GFCI WALLPLATES	4	WHITE	10	100
S18835-W	SCREWLESS DECORA /GFCI WALLPLATES	5	WHITE	10	100

D15



Wallplates



FEATURES:

- :: Made from impact resistant GE LEXAN 241
- :: Smooth finish without recessed lines or seams for easy cleaning and attractive appearance
- :: UL listed
- :: Mounting screws with matching finish included

APPLICATION:

- :: Our high quality wallplates meet or exceed all industry standards. We manufacture our wallplates in three sizes: standard, mid-size and oversize for better versatility and fit.

Ref: **UL** File#: **E 2 3 6 9 3 8**

8801



8802



8803



8804

BLANK PLASTIC WALLPLATES

CAT NO.	DESCRIPTION	GANG	COLOR	STD. PKG.	
				INNER	MASTER
8801-W	BLANK WALLPLATE	1	WHITE	25	200
8801-I	BLANK WALLPLATE	1	IVORY	25	200
8802-W	BLANK WALLPLATE	2	WHITE	25	200
8802-I	BLANK WALLPLATE	2	IVORY	25	200
8803-W	BLANK WALLPLATE	3	WHITE	25	200
8803-I	BLANK WALLPLATE	3	IVORY	25	200
8804-W	BLANK WALLPLATE	4	WHITE	25	200
8804-I	BLANK WALLPLATE	4	IVORY	25	200



8811



8812



8813



8814

TOGGLE SWITCH PLASTIC WALLPLATES

CAT NO.	DESCRIPTION	GANG	COLOR	STD. PKG.	
				INNER	MASTER
8811-W	TOGGLE SWITCH WALLPLATE	1	WHITE	25	200
8811-I	TOGGLE SWITCH WALLPLATE	1	IVORY	25	200
8812-W	TOGGLE SWITCH WALLPLATE	2	WHITE	25	200
8812-I	TOGGLE SWITCH WALLPLATE	2	IVORY	25	200
8813-W	TOGGLE SWITCH WALLPLATE	3	WHITE	25	200
8813-I	TOGGLE SWITCH WALLPLATE	3	IVORY	25	200
8814-W	TOGGLE SWITCH WALLPLATE	4	WHITE	25	200
8814-I	TOGGLE SWITCH WALLPLATE	4	IVORY	25	200

D16



Wallplates



FEATURES:

- :: Made from impact resistant GE LEXAN 241
- :: Smooth finish without recessed lines or seams for easy cleaning and attractive appearance
- :: UL listed

APPLICATION:

- :: Our high quality wallplates meet or exceed all industry standards. We manufacture our wallplates in three sizes: standard, mid-size and oversize for better versatility and fit.

Ref: UL File#: **E 2 3 6 9 3 8**

8851

SINGLE RECEPTACLE PLASTIC WALLPLATES

CAT NO.	DESCRIPTION	GANG	COLOR	STD. PKG.	
				INNER	MASTER
8851-W	1-3/16" DIA. HOLE SINGLE RECEPTACLE WALLPLATE	1	WHITE	10	200
8851-I	1-3/16" DIA. HOLE SINGLE RECEPTACLE WALLPLATE	1	IVORY	10	200



8821



8822



8823



8824

DUPLEX RECEPTACLE PLASTIC WALLPLATES

CAT NO.	DESCRIPTION	GANG	COLOR	STD. PKG.	
				INNER	MASTER
8821-W	DUPLEX RECEPTACLE WALLPLATE	1	WHITE	25	200
8821-I	DUPLEX RECEPTACLE WALLPLATE	1	IVORY	25	200
8821-A	DUPLEX RECEPTACLE WALLPLATE	1	ALMOND	25	200
8822-W	DUPLEX RECEPTACLE WALLPLATE	2	WHITE	25	200
8822-I	DUPLEX RECEPTACLE WALLPLATE	2	IVORY	25	200
8822-A	DUPLEX RECEPTACLE WALLPLATE	2	ALMOND	25	200
8823-W	DUPLEX RECEPTACLE WALLPLATE	3	WHITE	10	200
8823-I	DUPLEX RECEPTACLE WALLPLATE	3	IVORY	10	200
8824-W	DUPLEX RECEPTACLE WALLPLATE	4	WHITE	10	200
8824-I	DUPLEX RECEPTACLE WALLPLATE	4	IVORY	10	200



FEATURES:

- :: Made from high-impact resistant GE LEXAN 241
- :: Smooth finish without recessed lines or seams for easy cleaning and attractive appearance
- :: UL listed

APPLICATION:

- :: Our high quality wallplates meet or exceed all industry standards. We manufacture our wallplates in three sizes: standard, mid-size and oversize for better versatility and fit.

Ref: **UL** File#: **E 2 3 6 9 3 8**

8831



8832



8833



8834

DECORATIVE/GFCI PLASTIC WALLPLATES

CAT NO.	DESCRIPTION	GANG	COLOR	STD. PKG.	
				INNER	MASTER
8831-W	DECORATIVE/GFCI WALLPLATE	1	WHITE	25	200
8831-I	DECORATIVE/GFCI WALLPLATE	1	IVORY	25	200
8831-A	DECORATIVE/GFCI WALLPLATE	1	ALMOND	25	200
8832-W	DECORATIVE/GFCI WALLPLATE	2	WHITE	25	200
8832-I	DECORATIVE/GFCI WALLPLATE	2	IVORY	25	200
8832-A	DECORATIVE/GFCI WALLPLATE	2	ALMOND	25	200
8833-W	DECORATIVE/GFCI WALLPLATE	3	WHITE	10	200
8833-I	DECORATIVE/GFCI WALLPLATE	3	IVORY	10	200
8833-A	DECORATIVE/GFCI WALLPLATE	3	ALMOND	10	200
8834-W	DECORATIVE/GFCI WALLPLATE	4	WHITE	25	200
8834-I	DECORATIVE/GFCI WALLPLATE	4	IVORY	25	200
8834-A	DECORATIVE/GFCI WALLPLATE	4	ALMOND	25	200

D18



Wallplates





FEATURES:

- :: Commercial grade brushed stainless steel wall plates
- :: Provides extended life in abusive and corrosive environments
- :: Stainless steel mounting screws included
- :: Smooth finish without recessed lines or grooves for easy cleaning and attractive appearance
- :: Fits all standard one and two gang electrical junction boxes

APPLICATION:

- :: Manufactured from durable 430 stainless steel, our wallplates are ideal for any environment where durability and weather-resistant features are desired.

Ref: UL File#: **E 237553**

ONE-GANG STAINLESS STEEL WALLPLATES

CAT NO.	DESCRIPTION	GANG	STD. PKG.	
			INNER	MASTER
7701	BLANK STAINLESS STEEL WALLPLATE	1	25	200
7711	TOGGLE SWITCH STAINLESS STEEL WALLPLATE	1	25	200
7721	DUPLEX RECEPTACLE STAINLESS STEEL WALLPLATE	1	25	200
7731	DECORATIVE/GFCI STAINLESS STEEL WALLPLATE	1	25	200
SSC14	SINGLE RECEPTACLE STAINLESS STEEL WALLPLATE	1	-	100
SSC14-1	POWER OUTLET RECEPTACLE 2.125" DIAMETER HOLE	1	-	100



TWO-GANG STAINLESS STEEL WALLPLATES

CAT NO.	DESCRIPTION	GANG	STD. PKG.	
			INNER	MASTER
7702	BLANK STAINLESS STEEL WALLPLATE	2	25	200
7712	TOGGLE SWITCH STAINLESS STEEL WALLPLATE	2	25	200
7722	DUPLEX RECEPTACLE STAINLESS STEEL WALLPLATE	2	25	200
7732	DECORATIVE/GFCI STAINLESS STEEL WALLPLATE	2	25	200
SSC24	SINGLE RECEPTACLE STAINLESS STEEL WALLPLATE	2	-	50
SSC24-1	2.156" DIA. HOLE POWER OUTLET RECEPTACLE STAINLESS WALLPLATE	2	-	50
7792	2.125" DIA. HOLE (MIDWAY) SMOOTH METAL POWER OUTLET RECEPTACLE STAINLESS WALLPLATE	2	25	100

D19

Wallplates



FEATURES:

- :: Commercial grade brushed stainless steel wallplates
- :: Provides extended life in abusive and corrosive environments
- :: Stainless steel mounting screws included
- :: Smooth finish without recessed lines is easy to clean and maintain attractive appearance
- :: Fits all standard one and two gang electrical junction boxes

APPLICATION:

- :: Manufactured from rugged 430 stainless steel, our wallplates are ideal for any environment where durability and weather-resistant features are desired.



TWO-GANG COMBINATION STAINLESS STEEL WALLPLATES

CAT NO.	DESCRIPTION	GANG	STD. PKG.	
			INNER	MASTER
SSC25	(1-GANG TOGGLE SWITCH & 1-GANG DECORATIVE/GFCI) STAINLESS STEEL WALLPLATE	2	-	50
SSC26	(1-GANG SINGLE RECEPTACLE & 1-GANG DUPLEX RECEPTACLE) STAINLESS STEEL WALLPLATE	2	-	50
SSC27	(1-GANG DU SWITCH & 1-GANG DECORATIVE/GFCI) STAINLESS STEEL WALLPLATE	2	-	50
SSC28	(1-GANG DUPLEX RECEPTACLE & 1-GANG BLANK) STAINLESS STEEL WALLPLATE	2	-	50
SSC29	(1-GANG TOGGLE SWITCH & 1-GANG DUPLEX RECEPTACLE) STAINLESS STEEL WALLPLATE	2	-	50
SSC2A	(1-GANG TOGGLE SWITCH & 1-GANG BLANK) STAINLESS STEEL WALLPLATE	2	-	50
SSC2B	(1-GANG DECORATIVE/GFCI & 1-GANG BLANK) STAINLESS STEEL WALLPLATE	2	-	50
SSC2C	(1-GANG SINGLE RECEPTACLE & 1-GANG TOGGLE SWITCH) STAINLESS STEEL WALLPLATE	2	-	50
SSC2D	(1-GANG SINGLE RECEPTACLE & 1-GANG BLANK) STAINLESS STEEL WALLPLATE	2	-	50

D20

Wallplates



FEATURES:

- :: Commercial grade brushed stainless steel wallplates
- :: Provides extended life in abusive and corrosive environments
- :: (2) 3/4" stainless steel mounting screws included
- :: Smooth finish without recessed lines or grooves for easy cleaning and attractive appearance
- :: Fits all standard one and two-gang electrical junction boxes

APPLICATION:

- :: Manufactured from durable 430 stainless steel, our wall plates are ideal for any environment where durability and weather resistant features are desired.

**THREE-GANG STAINLESS STEEL WALLPLATES**

CAT NO.	DESCRIPTION	GANG	STD. PKG.	
			INNER	MASTER
SSC35	BLANK STAINLESS STEEL WALLPLATE	3	-	25
SSC32	TOGGLE SWITCH STAINLESS STEEL WALLPLATE	3	-	25
SSC34	SINGLE RECEPTACLE STAINLESS STEEL WALLPLATE	3	-	25
SSC33	DUPLEX RECEPTACLE STAINLESS STEEL WALLPLATE	3	-	25
SSC31	DECORATIVE/GFCI STAINLESS STEEL WALLPLATE	3	-	25

THREE-GANG COMBINATION STAINLESS STEEL WALLPLATES

CAT NO.	DESCRIPTION	STD. PKG.	
		INNER	MASTER
SSC36	THREE-GANG, 2-GANG TOGGLE SWITCH & 1-GANG DECORATIVE/GFCI STAINLESS STEEL WALLPLATE	-	10
SSC37	THREE-GANG, 2-GANG TOGGLE SWITCH & 1-GANG DUPLEX RECEPTACLE STAINLESS STEEL WALLPLATE	-	10
SSC38	THREE-GANG, 2-GANG DUPLEX RECEPTACLE & 1-GANG BLANK STAINLESS STEEL WALLPLATE	-	10
SSC39	THREE-GANG, 2-GANG DUPLEX RECEPTACLE & 1-GANG TOGGLE SWITCH STAINLESS STEEL WALLPLATE	-	10
SSC3A	THREE-GANG, 2-GANG DECORATIVE/GFCI & 1-GANG TOGGLE SWITCH STAINLESS STEEL WALLPLATE	-	10
SSC3B	THREE-GANG, 2-GANG TOGGLE SWITCH & 1-GANG BLANK STAINLESS STEEL WALLPLATE	-	10
SSC3C	THREE-GANG, 1-GANG TOGGLE SWITCH (CENTER) & 1-GANG BLANK (EACH SIDE) STAINLESS STEEL WALLPLATE	-	10

D21

Wallplates



**FEATURES:**

- :: Commercial grade brushed stainless steel wallplates
- :: Provides extended life in abusive and corrosive environments
- :: (2) 3/4" stainless steel mounting screws included
- :: Smooth finish without recessed lines is easy to clean and maintain attractive appearance
- :: Fits all standard one and two gang electrical junction boxes

APPLICATION:

- :: Manufactured from rugged 430 stainless steel, our wallplates are ideal for any environment where durability and weather resistant features are desired.

**FOUR-GANG STAINLESS STEEL WALLPLATES**

CAT NO.	DESCRIPTION	GANG	STD. PKG.	
			INNER	MASTER
SSC45	BLANK STAINLESS STEEL WALLPLATE	4	-	10
SSC42	TOGGLE SWITCH STAINLESS STEEL WALLPLATE	4	-	10
SSC43	DUPLEX RECEPTACLE STAINLESS STEEL WALLPLATE	4	-	10
SSC41	DECORATIVE/GFCI STAINLESS STEEL WALLPLATE	4	-	10

**FOUR-GANG COMBINATION STAINLESS STEEL WALLPLATES**

CAT NO.	DESCRIPTION	STD. PKG.	
		INNER	MASTER
SSC44	FOUR-GANG, 2-GANG DUPLEX RECEPTACLE & 2-GANG TOGGLE SWITCH STAINLESS STEEL WALLPLATE	-	10
SSC46	FOUR-GANG, 2-G DECORATIVE/GFCI & 2-GANG TOGGLE SWITCH STAINLESS STEEL WALLPLATE	-	10
SSC47	FOUR-GANG, 3-GANG TOGGLE SWITCH & 1-GANG DECORATIVE/GFCI STAINLESS STEEL WALLPLATE	-	10
SSC48	FOUR-GANG, 2-GANG DECORATIVE/GFCI & 2-GANG DUPLEX RECEPTACLE STAINLESS STEEL WALLPLATE	-	10
SSC49	FOUR-GANG, 3-GANG TOGGLE SWITCH & 1-GANG DUPLEX RECEPTACLE STAINLESS STEEL WALLPLATE	-	10
SSC4A	FOUR-GANG, 3-GANG TOGGLE SWITCH & 1-GANG BLANK STAINLESS STEEL WALLPLATE	-	10

D22

Wallplates





M507C-UL



M507CW-UL



M507CW3S-UL

FEATURES:

- :: Color coded terminal screws in open position ready for wiring
- :: 6-inch pigtail accommodates twist on wire connectors.
- :: Screw terminals designed for two conductors for feed through wiring.
- :: High-impact porcelain body withstands heat and corrosion
- :: Dust ring protects against plaster and dirt.
- :: Smooth finish is easy to clean and maintain.
- :: Mounts to 3/0 or 4/0 round junction boxes

APPLICATION:

- :: Ideal for unfinished areas such as attics, storage areas, barns and basements. Porcelain lampholder is excellent for high heat environment. Plastic lampholder is lightweight and virtually unbreakable; suitable for more abusive environments.

Ref: **UL** File#: **E 2 4 9 1 2 4****PORCELAIN LAMPHOLDERS**

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
M507C-UL	E26, PORCELAIN KEYLESS LAMPHOLDER, 4 TERMINAL SCREWS	660W / 250V	WHITE	-	50
M507CW-UL	E26, PORCELAIN KEYLESS LAMPHOLDER WITH PULL CHAIN, 4 TERMINAL SCREWS	660W / 250V	WHITE	-	50
M507CW3S-UL	E26, PORCELAIN KEYLESS LAMPHOLDER WITH PULL CHAIN, SINGLE 15A RECEPTACLE	660W / 250V	WHITE	-	50



MS507C-UL



MS507CW-UL

PLASTC (BAKELITE) LAMPHOLDERS

CAT NO.	DESCRIPTION	RATING	COLOR	STD. PKG.	
				INNER	MASTER
MS507C-UL	E26, BAKELITE KEYLESS LAMPHOLDER WITH 2 TERMINAL SCREWS	660W / 250V	WHITE	-	50
MS507CW-UL	E26, BAKELITE KEYLESS LAMPHOLDER WITH PULL CHAIN, 2 TERMINAL SCREWS	660W / 250V	WHITE	-	50

D23

Lampholders



FEATURES:

- :: One-gang tiger grip junction box for (old work) remodel applications
- :: (2) ½" knockouts on each side & back, (2) Romex entries with integral clamp top and bottom DZB-B1
- :: (2) ½" knockouts on each side, (1) ½" K.O. top and bottom DZB-A1 & DZB-A2
- :: Available with ½" or ¾" K.O.'s

Ref: **UL** File#: **E 3 3 7 0 3 0****ONE-GANG TIGER GRIP (OLD WORK)**


CAT NO.	DESCRIPTION	GANG	KNOCKOUTS		STD. PKG.	
			SIDE	TOP / BOTTOM	INNER	MASTER
DZB-A2-1	2-¾" DEEP BOX, TIGER GRIP	1	2-½"	1-½"	-	50
DZB-B-1	2-½" BOX TIGER GRIP - ROMEX	1	2-½"	2-¾" ROMEX	-	50

D24



Tiger Grip



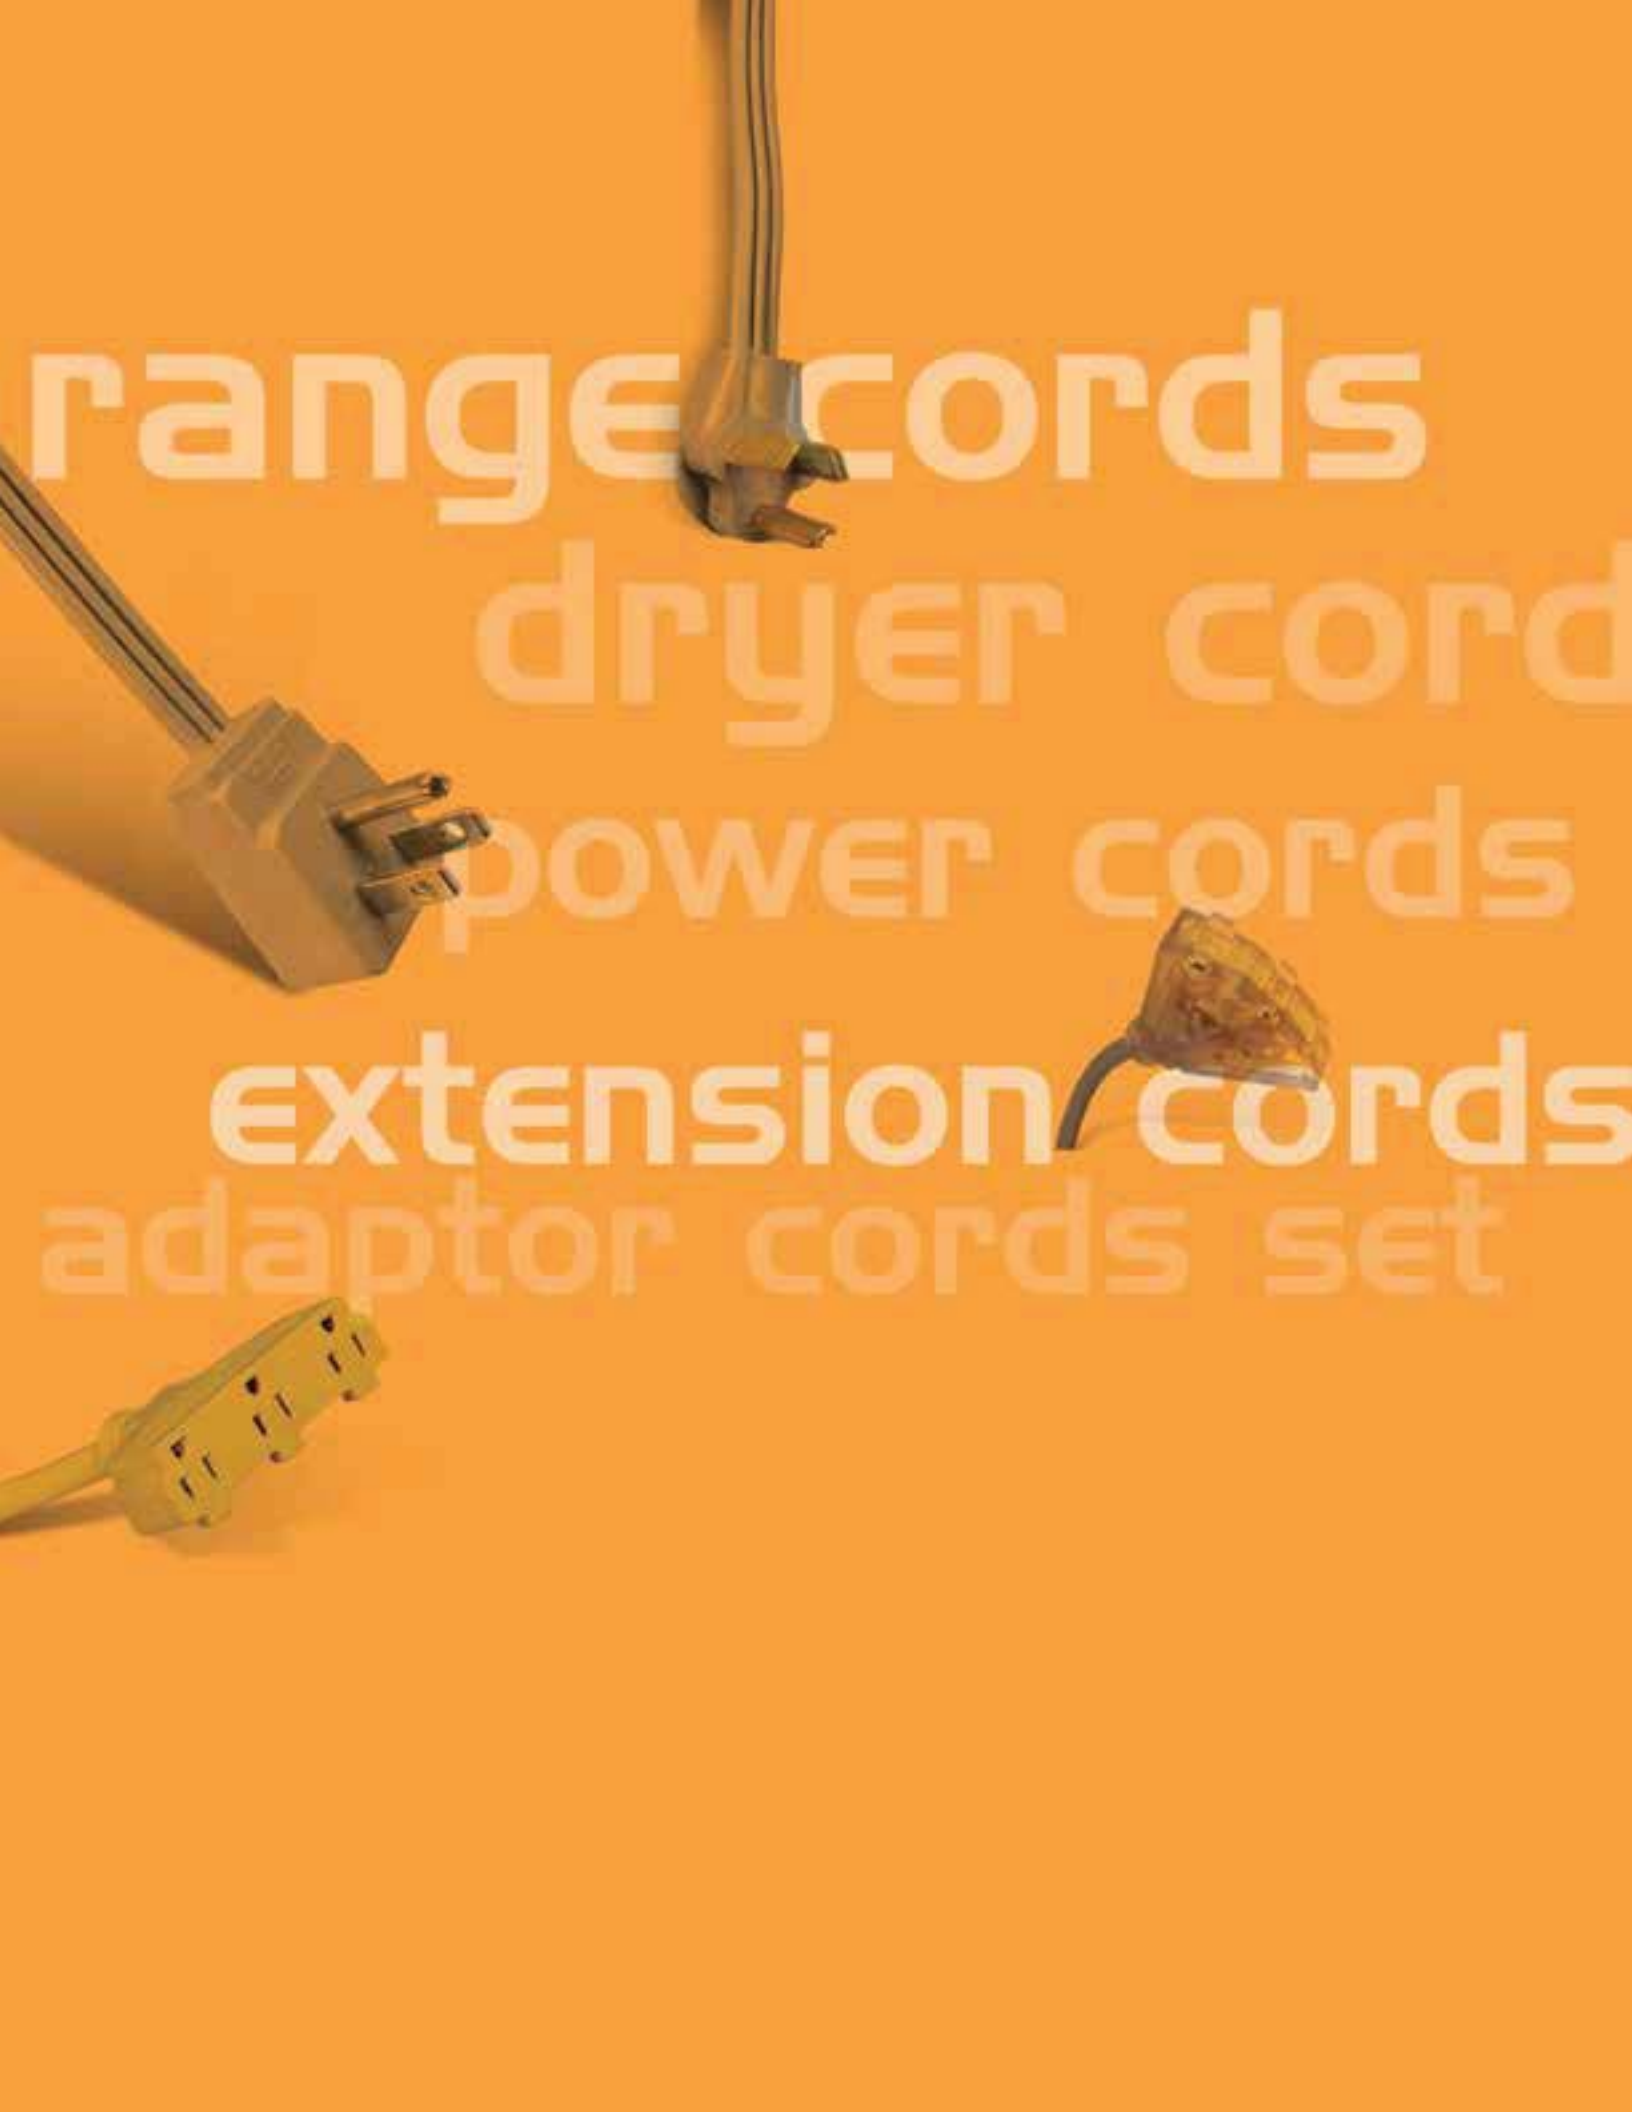

range cords

dryer cord

power cords

extension cords

adaptor cords set



cords

Westgate offers a wide array of popular range, dryer, general-purpose, outdoor extension cords and cord sets that meet many different applications. They are all designed and UL-listed to deliver the best performance possible.



FEATURES:

- ⌘ Right angle plug with thick vinyl insulation
- ⌘ Installation hardware included
- ⌘ Reinforced blades help prevent accidental bending or breaking
- ⌘ Heavy-duty strain relief protects cord resulting in longer cord life

APPLICATIONS:

- ⌘ Replacement cords for range or dryer
- ⌘ For home and commercial appliances

Ref: **UL** File#: **E218475**



DRY series



DRY5430



DRYER CORDS | 125V/250V

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
DRY4	SRDT 3 CONDUCTOR, 10/3AWG, WITH FORK TERMINAL, PC (10-30P), GRAY	30A	4 FEET	10
DRY5	SRDT 3 CONDUCTOR, 10/3AWG, WITH FORK TERMINAL, PC (10-30P), GRAY	30A	5 FEET	10
DRY6	SRDT 3 CONDUCTOR, 10/3AWG, WITH FORK TERMINAL, 125/250v, PC (10-30P), GRAY	30A	6 FEET	10
DRY5430	SRDT 4 CONDUCTOR, 8/2+10/2AWG, WITH FORK TERMINAL, 125/250V, PLU (14-30), BLACK	30A	5 FEET	10

E1

Dryer Cords





FEATURES:

- ⚡ Right angle plug with thick vinyl insulation
- ⚡ Installation hardware included
- ⚡ Reinforced blades help prevent accidental bending or breaking
- ⚡ Heavy-duty strain relief protects cord resulting in longer cord life

APPLICATIONS:

- ⚡ Replacement cords for range or dryer
- ⚡ For home and commercial appliances

Ref: **UL** File#: **E218475**



RANGE series



RANGE54 series




RANGE CORDS | 125V/250V

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
RANGE4	SRDT 8/2 + 10/1AWG/ 3 CONDUCTOR, WITH FORK TERMINAL, 125/25V, PC(10-50P), GRAY	40A	4 FEET	10
RANGE5	SRDT 8/2 + 10/1AWG/ 3 CONDUCTOR, WITH FORK TERMINAL, 125V, PC(10-50P), GRAY	40A	5 FEET	10
RANGE6	SRDT 8/2 + 10/1AWG/ 3 CONDUCTOR, WITH FORK TERMINAL, 125/250v PC(10-50P), GRAY	40A	6 FEET	10
RANGE5440	SRDT 8/2 + 10/2AWG/ 4 CONDUCTOR, WITH FORK TERMINAL, 125/250V, PLU(14-30), BLACK	40A	4 FEET	10
RANGE5450	SRDT 8/2 + 10/2AWG/ 4 CONDUCTOR, WITH FORK TERMINAL, 125/250V, PLU(14-30), BLACK	50A	5 FEET	10

E2

Range Cords



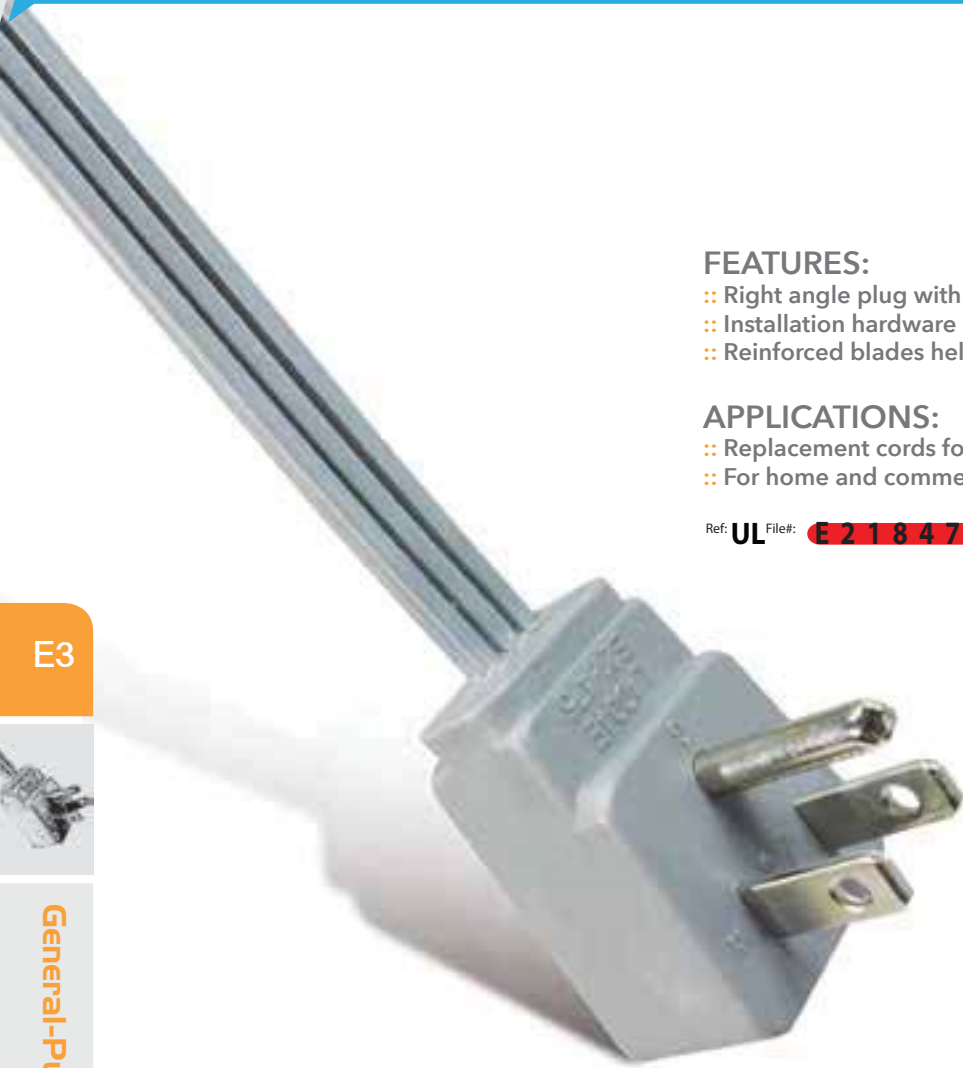

- FEATURES:**
- ⌘ Right angle plug with thick vinyl insulation
 - ⌘ Installation hardware included
 - ⌘ Reinforced blades help prevent accidental bending or breaking

- APPLICATIONS:**
- ⌘ Replacement cords for range or dryer
 - ⌘ For home and commercial appliances

Ref: **UL** File#: **E 2 1 8 4 7 5**

GPA series



ANGLE PLUG, GENERAL-PURPOSE CORDS | 125V-13A, GRAY

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
GPA3-2	SPT-2 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPA3-3	SPT-3 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPA6-2	SPT-2 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPA6-3	SPT-3 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPA8-2	SPT-2 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50
GPA8-3	SPT-3 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50



FEATURES:

- ⚡ Straight plug with vinyl insulation
- ⚡ Installation hardware included
- ⚡ Reinforced blades help prevent accidental bending or breaking

APPLICATIONS:

- ⚡ Replacement cords for range or dryer
- ⚡ For home and commercial appliances

Ref: **UL** File#: **E218475**



GPS series

STRAIGHT PLUG, GENERAL-PURPOSE CORDS | 125V-13A, GRAY

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
GPS3-2	SPT-2 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPS3-3	SPT-3 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPS6-2	SPT-2 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPS6-3	SPT-3 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPS8-2	SPT-2 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50
GPS8-3	SPT-3 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50

E4

General-Purpose Power Cords



E5

Outdoor Extension Cords

FEATURES:

- ⌘ Straight plug with vinyl insulation
- ⌘ Installation hardware included
- ⌘ Reinforced blades help prevent accidental bending or breaking

APPLICATIONS:

- ⌘ Replacement cords for range or dryer
- ⌘ For home and commercial appliances

Ref: **UL** File#: **E218475**

EX series



OUTDOOR EXTENSION CORDS | 125V-15A, YELLOW

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
EX123-50	SJTW 12AWG/ 3 CONDUCTOR, 125V, OUTSIDE EXTENSION CORD	15A	50 FEET	2
EX123-100	SJTW 12AWG/ 3 CONDUCTOR, 125V, OUTSIDE EXTENSION CORD	15A	100 FEET	6
EX143-25	SJTW 12AWG/ 3 CONDUCTOR, 125V, OUTSIDE EXTENSION CORD	15A	25 FEET	4
EX143-50	SJTW 12AWG/ 3 CONDUCTOR, 125V, OUTSIDE EXTENSION CORD	15A	50 FEET	10
EX143-100	SJTW 14AWG/ 3 CONDUCTOR, 125V, OUTSIDE EXTENSION CORD	15A	100 FEET	8
EX163-25	SJTW 16AWG/ 3 CONDUCTOR, 125V, OUTSIDE EXTENSION CORD	13A	25 FEET	20
EX163-50	SJTW 16AWG/ 3 CONDUCTOR, 125V, OUTSIDE EXTENSION CORD	13A	50 FEET	12





FEATURES:

- ⌘ Straight plug with vinyl insulation
- ⌘ Installation hardware included
- ⌘ Reinforced blades help prevent accidental bending or breaking
- ⌘ Heavy-duty strain relief protects cord resulting in longer cord life

APPLICATIONS:

- ⌘ Replacement cords for range or dryer
- ⌘ For home and commercial appliances

Ref: **UL** File#: **E218475**

EXL series



LIGHTED OUTDOOR EXTENSION CORDS | 125V-15A, BLUE

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
EXL143-50	SJTW 14AWG/ 3 CONDUCTOR, 125V, OUTDOOR EXTENSION CORD, LIGHTED PLUG, BLUE	15A	50 FEET	6
EXL143-100	SJTW 14AWG/ 3 CONDUCTOR, 125V, OUTDOOR EXTENSION CORD, LIGHTED PLUG, BLUE	15A	100 FEET	3
EXL123-50	SJTW 12AWG/ 3 CONDUCTOR, 125V, OUTDOOR EXTENSION CORD, LIGHTED PLUG, BLUE	15A	50 FEET	4
EXL123-100	SJTW 12AWG/ 3 CONDUCTOR, 125V, OUTDOOR EXTENSION CORD, LIGHTED PLUG, BLUE	15A	100 FEET	2

E6



Outdoor Extension Cords





FEATURES:

- ⌘ Straight plug with vinyl insulation
- ⌘ Installation hardware included
- ⌘ Reinforced blades help prevent accidental bending or breaking

APPLICATIONS:

- ⌘ Great for providing portable power to any job

Ref: **UL** File#: **E218475**



EX143

EXTENSION CORD WITH 3-OUTLETS, OUTDOOR

	DESCRIPTION	RATING	LENGTH	STD. PKG.
EX143	STW 14AWG/3 CONDUCTOR, 125V, 3-OUTLETS OUTDOOR EXTENSION CORD, YELLOW	15A	2 FEET	20



EXAD143

EXTENSION CORD WITH LIGHTED OUTLET, TWIST LOCK PLUG, OUTDOOR

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
EXAD143	STW 14AWG/ 3 CONDUCTOR, 125V, TWIST LOCK PLUG, LIGHTED OUTLET, YELLOW	15A	2 FEET	20





FEATURES:

- ⚡ Straight plug with vinyl insulation
- ⚡ Installation hardware included
- ⚡ Reinforced blades help prevent accidental bending or breaking

APPLICATIONS:

- ⚡ Great for providing portable power to any job

Ref: **UL** File#: **E218475**

EXADL143



EXTENSION CORD WITH LIGHTED OUTLET, TWIST LOCK PLUG, OUTDOOR

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
EXADL143	STW 14AWG/ 3 CONDUCTOR, 125V, TWIST LOCK PLUG, LIGHTED OUTLET, YELLOW	15A	2 FEET	20



EXY143



EXTENSION CORD WITH TRIPLE OUTLET, TWIST LOCK IN/OUT, OUTDOOR

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
EXY143	STW 14AWG/ 3 CONDUCTOR, 125V, TRIPLE OUTLET TWIST ADAPTER OUTDOOR EXTENSION CORD, YELLOW	15A	2 FEET	10

E8

Adaptor Cord Sets





**single
interface**



modular interface



service enclosure

communication enclosures


Westgate's outdoor communication enclosures are manufactured using 18 gauge galvanized steel with a durable powder coat finish to prevent rust and corrosion.

F1

Communication Enclosures

FEATURES:

- :: 18GA galvanized steel with durable powder coat paint finish to prevent rust
- :: For telephone and cable service providers (both labels included)
- :: Available with single or two screw covers
- :: Multiple screw holes for mounting directly to studs
- :: ETL listed

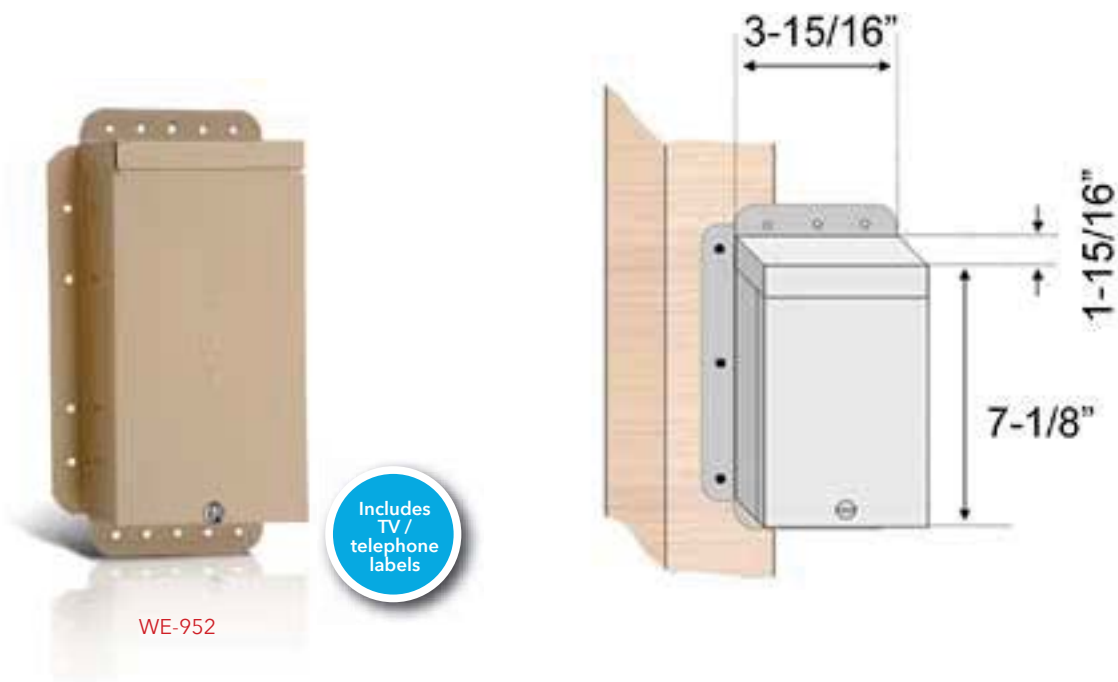

SINGLE INTERFACE COMMUNICATION ENCLOSURES


CAT NO.	CAPTIVE COVER SCREW	DIMENSIONS (Excluding bracket)			STD. PKG.
		WIDTH	HEIGHT	DEPTH	
WE-952	1	3-15/16"	7-1/8"	1-15/16"	1





WE-1026

Includes
TV /
telephone
labels

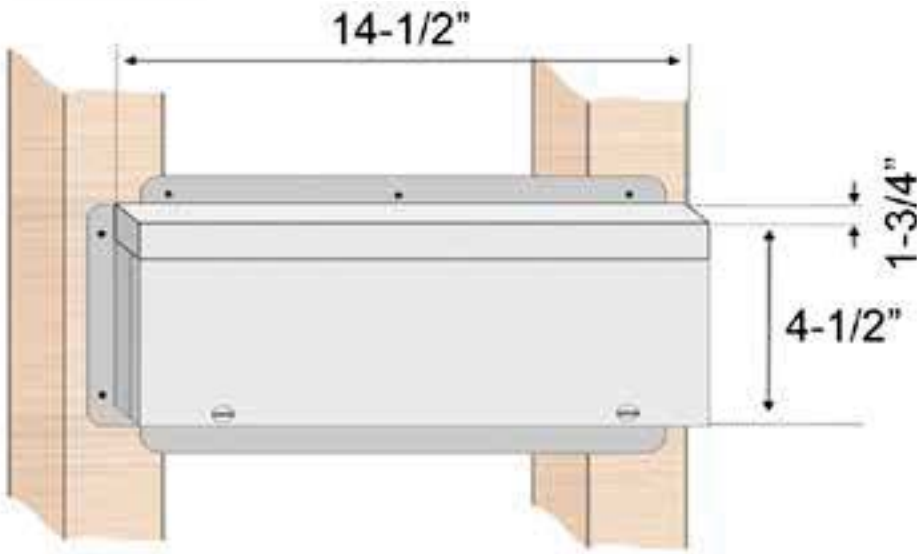

F2



Communication Enclosures

SINGLE INTERFACE COMMUNICATION ENCLOSURES

CAT NO.	CAPTIVE COVER SCREW	DIMENSIONS (Excluding bracket)			STD. PKG.
		WIDTH	HEIGHT	DEPTH	
WE-1026	2	14-1/2"	4-1/2"	1-3/4"	1




FEATURES:

- :: 18GA galvanized steel with durable powder coat paint finish to prevent rust
- :: For telephone and cable service providers (both labels included)
- :: Available with two screw covers for secure mounting
- :: Multiple screw holes on flange for mounting directly to studs
- :: ETL listed
- :: "COMMUNICATION" embossed lid, with optional label for TV or telephone
- :: Wood back board provided for mounting cables and devices



WE-1152

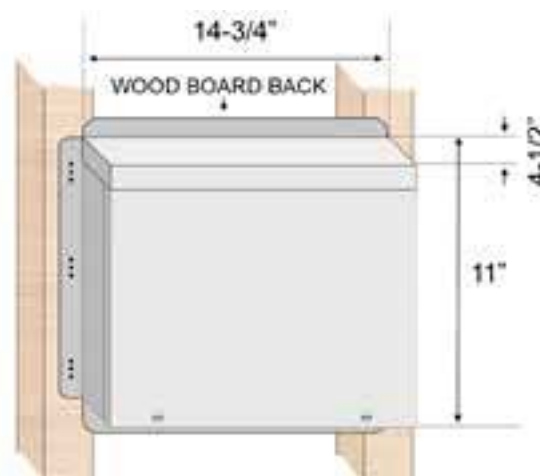

F3

Communication Enclosures

MODULAR INTERFACE COMMUNICATION ENCLOSURES

CAT NO.	CAPTIVE COVER SCREW	DIMENSIONS (Excluding bracket)			STD. PKG.
		WIDTH	HEIGHT	DEPTH	
WE-1152	1	14-3/4"	11"	4-1/2"	1






WE-1500D

FEATURES:

- :: 18GA galvanized steel with durable powder coat paint finish to prevent rust
- :: For telephone and cable service providers (both labels included)
- :: Four screw cover for better seal
- :: Multiple screw holes on flange for mounting directly to studs
- :: ETL listed
- :: "COMMUNICATION" embossed lid
- :: Wood back board provided for mounting cables and devices

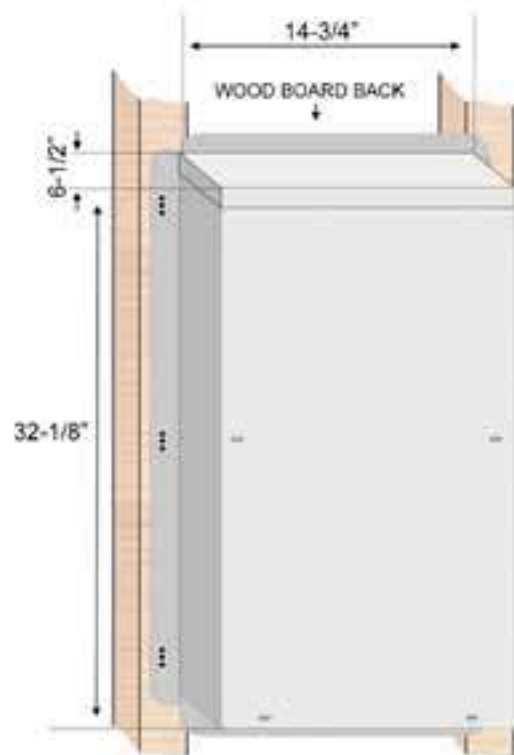

Includes
TV /
telephone
labels

SERVICE ENCLOSURES

CAT NO.	CAPTIVE COVER SCREW	DIMENSIONS (Excluding bracket)			STD. PKG.
		WIDTH	HEIGHT	DEPTH	
WE-1500D	4	14- ³ / ₄ "	32- ¹ / ₈ "	6- ¹ / ₂ "	1

F4

Communication Enclosures



low-voltage direct burial

RG6/U 60% coaxial (catv) cable

cat6 UTP cable

cat5 enhanced UTP cable

RG59/U coaxial cable

standard

landscaping wire



wire & cable

UL-listed and certified with high quality standards for flexibility and high-speed networking and communication. Top of the line, fully integrated and insulated, dependable and performance guaranteed. The Contractor's choice for easy pull-out packaging. Westgate also stocks high quantities of low voltage landscape cable.



CAT5E-BR



CAT5E-WR



CAT5E-GR



CAT5E-YR

The CAT5E Ethernet cable is the most popular cable for long, stationary runs, such as in a home or office network applications. While solid conductor cable is less flexible than cable with stranded conductors, but it provides better performance over longer distances. This bulk cable comes in a convenient self-dispensing box and the cable is marked by the foot to allow exact distances to be pre-measured then terminated to a connector, jack, or patch panel.

TECHNICAL SPECIFICATIONS:

- :: Rating: CMR
- :: Conductor nom O.D.: 0.208"
- :: Nom. cable diameter: 0.197"
- :: Nominal weight: 23 lbs
- :: Min. bend radius: 1.0"
- :: Max. tension: 25 lbs

PRODUCT FEATURES:

- :: Non-plenum cable
- :: PE Insulation
- :: Type CMR
- :: 24-gauge solid conductor, 4-pair
- :: Tested to 350 MHz
- :: Meets CAT5E Standards

Ref: **UL** File#: **E 3 2 5 9 0 5**



CATEGORY 5 ENHANCED UTP CABLE | 350 MHZ

CAT NO.	CONDUCTOR SIZE	JACKET	RATING	COLOR	STD. PKG.
CAT5E-BR	24 AWG SOLID COPPER	FR-PVC	CM	BLUE	1,000 FT. PER EZ- PULLOUT BOX
CAT5E-WR				WHITE	
CAT5E-GR				GRAY	
CAT5E-YR				YELLOW	

G1

Communication Cables



With Gigabit Ethernet, Broadband audio/video and security capabilities, CAT6 Bulk Cable is ideal for your critical network installation. It is offered in two standard colors, blue and white for easy identification.

TECHNICAL SPECIFICATIONS:

- :: Rating: CM
- :: Conductor nom O.D.: 0.022"
- :: Nom. cable diameter: 0.236"
- :: Nominal weight: 27 lbs
- :: Min. bend radius: 1.3"
- :: Maximum tension: 27 lbs

FEATURES:

- :: 4-pair unshielded twisted pair cable
- :: 23AWG solid bare copper conductor for superior conductivity
- :: Meets or exceeds CAT6 specifications
- :: Rated to 550Mhz to provide additional performance
- :: Bandwidth over and above the basic requirements of CAT6 550Mhz standards
- :: Durable, high-density polyethylene insulation, PVC jacket
- :: Installer-friendly cable shipped in reel-in-box packaging

Ref: **UL** File#: **E 3 2 5 9 0 5**



CAT6E-BR



CAT6E-WR



CATEGORY 6 UTP CABLE | 550 MHZ

CAT NO.	CONDUCTOR SIZE	JACKET	RATING	COLOR	STD. PKG.
CAT6-BR CAT6-WR	23 AWG SOLID COPPER	FR-PVC	CM	BLUE WHITE	1,000 FT. PER EZ- PULLOUT BOX

G2



Communication Cables




RG6B-1000
RG6B-500

RG6W-1000
RG6W-500

RG6QB-1000
RG6QB-500

RG6QW-1000
RG6QW-500

TECHNICAL SPECIFICATIONS:

- :: Rated temperature (°C): 75
- :: Flammability: CM
- :: Diameter: 1.02
- :: Insulation: skin foam PE
- :: Insulation diam. (±0.08mm): 4.57
- :: Nom. thickness (mm): 0.75
- :: Min. thickness 0.64
- :: Cable diameter (±0.15mm): 6.90
- :: Reference standard: SCTE IPS-SP-001
UL1655, UL13, UL444
TFC drop cable

FEATURES:

- :: 18 AWG copper clad-steel center conductor
- :: Quad shield: 2ea.100% Foil, 1ea. 60% Aluminum, 1ea. 40% aluminum braid
- :: 75 ohm coaxial cable
- :: Low-loss for use on long runs
- :: 60% braid/100% foil shield
- :: Sweep-tested to 3 GHz
- :: Available in 500 ft. & 1000ft. reel-In-box
- :: Footage marked
- :: Available in black and white

APPLICATION:

- :: Perfect for TV, CATV, SATV and CCTV applications

Ref: UL File#: **E 2 0 3 9 1 3**


RG6/U 60% COAXIAL (CATV) CABLE

CAT NO.	CONDUCTOR SIZE	JACKET	COLOR	STD. PKG.
RG6B-1000	18 AWG COPPER CLAD STEEL	PVC 0.275" Bonded Alum Foil and Alum Braid 60%	BLACK	1,000 FT. PER EZ- PULLOUT BOX
RG6W-1000			WHITE	
RG6B-500			BLACK	500 FT. PER EZ- PULLOUT BOX
RG6W-500			WHITE	

RG6/U QUAD-SHIELD COAXIAL (CATV) CABLE

RG6QB-1000	18 AWG COPPER CLAD STEEL	Alum. Foil 60%, Alum braid 40% and X2 (double)	BLACK	1,000 FT. PER EZ- PULLOUT BOX
RG6QW-1000			WHITE	
RG6QB-500			BLACK	500 FT. PER EZ- PULLOUT BOX
RG6QW-500			WHITE	


G3

Coaxial cables (RG6)





RG59-95



TECHNICAL SPECIFICATIONS:

- :: Shielding: 40% aluminum foil
95% aluminum braid
- :: Conductor size: 20 AWG
- :: Outside jacket: PVC 7/32"
- :: Capacitance (PF/M): 50
- :: Impedance: 75 Ohms
- :: Color: black
- :: Length: 1000 ft. per reel

FEATURES:

- :: 20AWG center conductor
- :: Foil & braid shield
- :: Non-plenum


APPLICATION:

- :: Perfect for CCTV applications

Ref: **UL** File#: **E 203913**



RG59-95 2/18



RG59/U COAXIAL CABLE | STANDARD

CAT NO.	CONDUCTOR SIZE	JACKET	COLOR	STD. PKG.
RG59-AL	20 AWG	PVC 7/32"	BLACK	1,000 FT. PER WOODEN REEL/BOX

RG59/U COAXIAL CABLE | 95% COPPERSHIELD

RG59-95	20 AWG	PVC 14/32"	BLACK	1,000 FT. PER WOODEN REEL/BOX
---------	--------	------------	-------	----------------------------------

G4

Coaxial cables (RG59)



Westgate's low-voltage cable is rated for direct burial and is ideal for landscape lighting applications. Available in 500-foot spools.

FEATURES:

- :: For all types of low-voltage jobs
- :: Available in 8, 10, 12 and 14-gauges
- :: Rated for direct burial
- :: UV resistant
- :: Stranded pure copper conductor
- :: PVC insulation is flexible and very easy to work with; UV inhibitors for added protection.
- :: Remains flexible in cold climates and resists polymerization from the sun.
- :: Wood spool EZ pull box

APPLICATION:

- :: Specifically designed for low voltage landscape lighting and outdoor lighting applications



LOV-14
LOV-12
LOV-10
LOV-8



LOW-VOLTAGE DIRECT BURIAL LANDSCAPE LIGHTING WIRE

CAT NO.	WIRE SIZE	STRANDING	COLOR	STD. PKG.
LOV-14	14AWG	41 X 30	BLACK	500 FT. PER REEL/BOX
LOV-12	12AWG	65 X 30		
LOV-10	10AWG	104 X 30		
LOV-8	8AWG	168 X 30		





Alphabetical Product Index

CATALOG NO.	PAGE
0305A	77
0305FAH	76
0310AA	77
0310FAH	76
0315FAH	76
0320AA	77
0325L	76
17001-I	85
17001-W	85
17002-I	85
17002-NS-W	85
17002-W	85
50301-I	84
50301-W	84
50321-I	84
50321-W	84
62001	69
62002	69
62003	69
62004	69
62005	69
62006	69
62007	69
62008	69
62010	69
62021	68
62022	68
62023	68
62024	68
62025	68
62026	68
62027	68
62028	68
62030	68
62121	68
62122	68
62123	68
62124	68
62125	68
62126	68
62201	69
62202	69
62203	69
62204	69
62205	69
62206	69
62207	69
62208	69
62209	69
62210	69

CATALOG NO.	PAGE
7701	98
7702	98
7711	98
7712	98
7721	98
7722	98
7731	98
7732	98
7792	98
82018	57
82059	52
82060	52
82061	52
82062	52
82063	52
82064	52
82065	52
82066	52
82067	52
82069	52
84001	57
84022	52
84023	52
84024	52
84025	52
85002	55
85003	55
85004	55
85005	55
85006	55
85007	55
85008	55
85009	55
85011	55
88003	56
88019	56
8801-I	95
8801-W	95
88024	56
88025	56
88026	56
88027	56
88028	56
8802-I	95
8802-W	95
88036	42
88037	42
88038	42
88039	42
8803-I	95

CATALOG NO.	PAGE
8803-W	95
88040	42
88041	42
88042	42
88043	42
88044	42
88045	42
8804-I	95
8804-W	95
88062	46
88063	46
88064	46
88065	46
88066	46
88067	46
88068	46
88069	46
88070	46
88071	46
88116	55
88117	55
88118	55
88119	55
8811-I	95
8811-W	95
88120	55
88121	55
88122	55
88123	55
88125	55
8812-I	95
8812-W	95
8813-I	95
8813-W	95
8814-I	95
8814-W	95
88201	52
8821-A	96
8821-I	96
8821-W	96
8822-A	96
8822-I	96
8822-W	96
8823-I	96
8823-W	96
8824-I	96
8824-W	96
8831-A	97
8831-I	97
8831-W	97

CATALOG NO.	PAGE
8832-A	97
8832-I	97
8832-W	97
8833-A	97
8833-I	97
8833-W	97
8834-A	97
8834-I	97
8834-W	97
8851-I	96
8851-W	96
BCS-25	71
BCS-38	71
C-100CG	37
C-125CG	37
C-150CG	37
C-200CG	37
C-250CG	37
C2S-100	70
C2S-200	70
C2S-50	70
C2S-75	70
C-300CG	37
C-400CG	37
C-50CG	37
C-75CG	37
CAT5E-BR	122
CAT5E-GR	122
CAT5E-WR	122
CAT5E-YR	122
CAT6-BR	123
CAT6-WR	123
CCO-50	49
CCO-75	49
CCON-1	45
CCON-1 I	45
CCON-1-RT	44
CCON-2	45
CCON-2 I	45
CCON-2-RT	44
CCON-3	45
CCON-3 I	45
CCON-3-RT	44
CCON-4	45
CCON-4 I	45
CCON-4-RT	44
CCON-5	45
CCON-5 I	45
CCON-5-RT	44
CCON-6	45

CATALOG NO.	PAGE
CCON-6 I	45
CCON-6-RT	44
CCON-7	45
CCON-7-RT	44
CCON-8	45
CCON-8-RT	44
CCON-9	45
CCON-9-RT	44
CCON-10	45
CCON-10-RT	44
CCOP-1	47
CCOP-1-RT	48
CCOP-2	47
CCOP-2-RT	48
CCOP-3	47
CCOP-3-RT	48
CCOP-4	47
CCOP-4-RT	48
CCOP-5	47
CCOP-5-RT	48
CCOP-6	47
CCOP-6-RT	48
CCOP-7	47
CCOP-7-RT	48
CCOP-8	47
CCOP-8-RT	48
CCOP-9	47
CCOP-9-RT	48
CCOP-10	47
CCOP-10-RT	48
CG-100	39
CG-125/150	39
CG-200	39
CG-250/300	39
CG-350/400	39
CG-50	39
CG-75	39
CH-1010	74
CH-1212	74
CHN-50	72
CHN-50L	72
CHN-75	72
CHN-75L	72
CHN-100	72
CHN-100L	72
CHN-125	72
CHN-150	72
CHN-200	72
CZ-11	64
DMF-3	84

CATALOG NO.	PAGE
DRY4	106
DRY5	106
DRY5430	106
DRY6	106
DZB-A2-1	103
DZB-B-1	103
EX123-100	110
EX123-50	110
EX143	112
EX143-25	110
EX143-50	110
EX143-100	110
EX163-25	110
EX163-50	110
EXAD143	112
EXADL143	113
EXL123-50	111
EXL123-100	111
EXL143-50	111
EXL143-100	111
EXY143	113
F1611	51
F1612	51
F1613	51
F7601	43
F7601-W	44
F7601-W-IS	44
F7602	43
F7602-W	44
F7602-W-IS	44
F7603	43
F7603-W	44
F7603-W-IS	44
F7604	43
F7604-W	44
F7604-W-IS	44
F7605	43
F7605-W	44
F7605-W-IS	44
F7606	43
F7606-W	44
F7606-W-IS	44
F7607	43
F7607-W	44
F7607-W-IS	44
F7608	43
F7608-W	44
F7608-W-IS	44
F7609	43
F7609-W	44

Alphabetical Product Index

CATALOG NO.	PAGE
F7609-W-IS	44
F7610	43
F7610-W	44
F7610-W-IS	44
F7611	47
F7611-W	48
F7612	47
F7612-W	48
F7613	47
F7613-W	48
F7614	47
F7614-W	48
F7615	47
F7615-W	48
F7616	47
F7616-W	48
F7617	47
F7617-W	48
F7618	47
F7618-W	48
F7619	47
F7619-W	48
F7620	47
F7620-W	48
F7701	43
F7702	43
F7703	43
F7704	43
F7705	43
F7706	43
F7707	43
F7708	43
F7709	43
F7710	43
F7711	46
F7712	46
F7713	46
F7714	46
F7715	46
F7716	46
F7717	46
F7718	46
F7719	46
F7720	46
FH-E	74
FH-S	74
GBI-1	60
GBI-2	60
GBI-3	60
GBI-4	60

CATALOG NO.	PAGE
GBI-5	60
GBI-6	60
GBI-7	60
GBI-8	60
GBI-9	60
GBI-10	60
GBILA-1	60
GBILA-2	60
GBILA-3	60
GBILA-4	60
GBILA-5	60
GBILA-6	60
GBILA-7	60
GBILA-8	60
GBILA-9	60
GBILA-10	60
GPA3-2	108
GPA3-3	108
GPA6-2	108
GPA6-3	108
GPA8-2	108
GPA8-3	108
GPS3-2	109
GPS3-3	109
GPS6-2	109
GPS6-3	109
GPS8-2	109
GPS8-3	109
GS-1032	75
GS-7	75
HET01-3R-W	82
HET01-W	82
HET06-W	83
HMT01-W	83
H-SCREW	74
IUC1V	27
IUC2V	27
K-11	64
K-11CS LHB1	66
K-11CS LHB2	66
K-11CS LHB3	66
K-11D	64
K-11LHB12	66
K-11LHB2	66
K-11LHB3	66
K-12D	64
K-13	65
K-22	64
K-22D	64
K-24SHBA	65

CATALOG NO.	PAGE
K-4	64
K-5D	64
K-6	65
K-7	65
K-71	65
K-72	65
K-8	64
LB-50CG	34
LB-75CG	34
LB-100CG	34
LB-125CG	34
LB-150CG	34
LB-200CG	34
LB-250CG	34
LB-300CG	34
LB-400CG	34
LH150-1	28
LH150-COMBO-BZ	28
LH150-COMBO-GR	28
LH150-COMBO-WH	28
LH150-GASKET	29
LL-50CG	35
LL-75CG	35
LL-100CG	35
LL-125CG	35
LL-150CG	35
LL-200CG	35
LL-250CG	35
LL-300CG	35
LL-400CG	35
LNS-100	63
LNS-125	63
LNS-150	63
LNS-200	63
LNS-250	63
LNS-300	63
LNS-350	63
LNS-400	63
LNS-50	63
LNS-75	63
LOV-8	126
LOV-10	126
LOV-12	126
LOV-14	126
LR-50CG	36
LR-75CG	36
LR-100CG	36
LR-125CG	36
LR-150CG	36
LR-200CG	36

CATALOG NO.	PAGE
LR-250CG	36
LR-300CG	36
LR-400CG	36
LUG OO	29
LUXDM600-15L-AL	84
LUXDM600-15L-IV	84
LUXDM600-15L-W	84
M507C-UL	102
M507CW3S-UL	102
M507CW-UL	102
MS507C-UL	102
MS507CW-UL	102
MVP94	60
MVP98	67
MVP99	67
NMLT-38	54
NMLT-50	54
NMLT-75	54
NMLT-100	54
NMLT-125	54
NMLT-150	54
NMLT-200	54
NMLT90-38	54
NMLT90-50	54
NMLT90-75	54
NMLT90-100	54
NMLT90-125	54
NMLT90-150	54
NMLT90-200	54
NO-50	72
NO-75	72
NO-100	72
NO-125	72
NO-150	72
NO-200	72
PC-B1	30
PC-B1-W	30
PC-B2	30
PC-FS1	30
PC-FSB1	30
PC-SM1	30
PC-SM2	30
PC-SMWS1	30
PE-1EBG	58
PE-1EEG	58
PE-1RBG	58
PE-1RRG	58
PE-2EBG	58
PE-2EEG	58
PE-2RBG	58

CATALOG NO.	PAGE
PE-2RRG	58
PE-3EBG	58
PE-3EEG	58
PE-3RBG	58
PE-3RRG	58
PE-4EBG	58
PE-4EEG	58
PE-4RBG	58
PE-4RRG	58
PL-50	29
PL-75	29
PL-100	29
PLB-50	61
PLB-75	61
PLB-100	61
PLB-125	61
PLB-150	61
PLB-200	61
PLB-250	61
PLB-300	61
PLB-350	61
PLB-400	61
RANGE4	107
RANGE5	107
RANGE5440	107
RANGE5450	107
RANGE6	107
RB-100/50	62
RB-100/75	62
RB-125/50	62
RB-125/75	62
RB-125/100	62
RB-150/50	62
RB-150/75	62
RB-150/100	62
RB-150/125	62
RB-200/50	62
RB-200/75	62
RB-200/100	62
RB-200/125	62
RB-200/150	62
RB-50/38	62
RB-75/50	62
RG59-95	125
RG59-AL	125
RG6B-500	124
RG6B-1000	124
RG6QB-500	124
RG6QB-1000	124
RG6QW-500	124

CATALOG NO.	PAGE
RG6QW-1000	124
RG6W-500	124
RG6W-1000	124
RTC-50	62
RTC-75	62
RTC-100	62
RTC-125	62
RTC-150	62
RTC-200	62
RWS-75/50	63
RWS-100/50	63
RWS-100/75	63
RWS-125/50	63
RWS-125/75	63
RWS-125/100	63
RWS-150/50	63
RWS-150/75	63
RWS-150/100	63
RWS-150/125	63
RWS-200/50	63
RWS-200/75	63
RWS-200/100	63
RWS-200/125	63
RWS-200/150	63
RWS-250/100	63
RWS-250/200	63
RWS-400/250	63
S-10	66
S-11	66
S18831-I	94
S18831-W	94
S18832-I	94
S18832-W	94
S18833-W	94
S18834-W	94
S18835-W	94
S-22	66
S-33	66
SAD-01	57
SCO-50	49
SCO-75	49
SCON-1I	42
SCON-2I	42
SCON-3I	42
SCON-4I	42
SCON-5I	42
SCON-6I	42
SIC-50	49
SIC-75	49
SICON-1	50

Alphabetical Product Index

CATALOG NO.	PAGE
SICON-1 I	50
SICON-2	50
SICON-2 I	50
SICON-3	50
SICON-3 I	50
SICON-4	50
SICON-4 I	50
SICON-5	50
SICON-5 I	50
SICON-6	50
SICON-6 I	50
SICOP-1	51
SICOP-2	51
SICOP-3	51
SICOP-4	51
SICOP-5	51
SICOP-6	51
SKO-100	75
SKO-125	75
SKO-150	75
SKO-200	75
SKO-50	75
SKO-75	75
SLB-50	39
SLB-75	39
SLB-100	39
SN-50	70
SN-100	70
SN-50/75	70
SSC14	98
SSC14-1	98
SSC24	98
SSC24-1	98
SSC25	99
SSC26	99
SSC27	99
SSC28	99
SSC29	99
SSC2A	99
SSC2B	99
SSC2C	99
SSC2D	99
SSC31	100
SSC32	100
SSC33	100
SSC34	100
SSC35	100
SSC36	100
SSC37	100
SSC38	100

CATALOG NO.	PAGE
SSC39	100
SSC3A	100
SSC3B	100
SSC3C	100
SSC41	101
SSC42	101
SSC43	101
SSC44	101
SSC45	101
SSC46	101
SSC47	101
SSC48	101
SSC49	101
SSC4A	101
T-50CG	38
T-75CG	38
T-100CG	38
T-125CG	38
T-150CG	38
T-200CG	38
T-250CG	38
T-300CG	38
T-350CG	38
T-400CG	38
UNI-50B	71
UNI-75B	71
UNI-100B	71
UNI-105B	71
UNI-125B	71
UNI-150B	71
UNI-200B	71
UNI-250B	71
UNI-300B	71
UNI-350B	71
UNI-400B	71
W1B50-3	12
W1B50-3-WH	12
W1B50-4	12
W1B50-5	12
W1B50-5-WH	12
W1B50-5X	12
W1B75-3	12
W1B75-3-WH	12
W1B75-4	12
W1B75-5	12
W1B75-5-WH	12
W1B75-5X	12
W1BC	22
W1BC-G	22
W1C-DH	22

CATALOG NO.	PAGE
W1C-DV	22
W1C-GH	22
W1C-GH-WH	22
W1C-GV	22
W1C-GV-WH	22
W1C-PO20	22
W1C-PO30	22
W1C-PO40	22
W1C-SV	22
W1C-SW	22
W1C-SW-S	22
W1C-TS	22
W1DB50-3	13
W1DB50-4	13
W1DB50-5X	13
W1DB75-3	13
W1DB75-4	13
W1DB75-5X	13
W1DB100-3	13
W1DB100-5X	13
W2B50-3	14
W2B50-4	14
W2B50-5	14
W2B50-5X	14
W2B50-6X	14
W2B50-7	14
W2B50-7X	14
W2B50-9	14
W2B75-3	14
W2B75-4	14
W2B75-5	14
W2B75-5X	14
W2B75-6X	14
W2B75-7	14
W2B75-7X	14
W2B75-9	14
W2BC	24
W2BC-G	24
W2C-2D	24
W2C-2G	24
W2C-2S	24
W2C-DH	24
W2C-GD	24
W2C-GS	24
W2CL-PO50	24
W2CL-PO60	24
W2C-SD	24
W2C-SW	24
W2DB50-5	16
W2DB50-7X	16

CATALOG NO.	PAGE
W2DB75-5	16
W2DB75-7X	16
W2DB100-5	16
W2DB100-7X	16
W2XB50-6	19
W2XB50-8	19
W2XB75-6	19
W3BC	26
W3C-3D	26
W3C-3G	26
W3C-3S	26
W3DB50-7	17
W3DB75-7	17
W3DB100-7	17
WC2-50	73
WC2-75	73
WC2-100	73
WC2-125	73
WC2-150	73
WC2-200	73
WC2-250	73
WC2-300	73
WC2-350	73
WC2-400	73
WE-952	116
WE-1026	117
WE-1152	118
WE-1500D	119
WG-1	29
WRB50-5	20
WRB50-5-BRZ	20
WRB50-5-W	20
WRB75-5	20
WRC-1	21
WRC-1-BRZ	21
WRC-1-W	21
WRC-2	21
WRC-2-BRZ	21
WRC-2-W	21
WRC-3	21
WRC-GASKET	29
WRE-1	21
WRE-2	21
WRE-3	21
WS1-38	70
WTH-1 I	53
WTH-2 I	53
WTH-3 I	53
WTH-4 I	53
WTH-5 I	53

CATALOG NO.	PAGE
WTH-6 I	53
WTH-7 I	53
WTH-8 I	53
WTH-9 I	53
WTH-10 I	53
WXB50-4	18
WXB50-6	18
WXB75-4	18
WXB75-6	18
WXF50-4	18
WXF50-6	18
WXF75-4	18
WXF75-6	18
WXR-1	19
WXR-2	19
WXR50-4	20
WXR75-4	20
YL25-B	74
YL25-100	74
YL25-500	74
YM181-IV	81
YM181-W	81
YM185-IV	81
YM185-W	81
YM2101-W	81
YM2105-IV	81
YM2105-W	81
YM2106	80
YM2106-T	80
YM2108-T	80
YM2120	80
YM2301	80
YMSN180-IV	81
YMSN180-W	81
YQ15R-C-A	89
YQ15R-C-I	89
YQ15R-C-W	89
YQ15R-D-S-AL	90
YQ15R-D-S-I	90
YQ15R-D-S-W	90
YQ15R-S-A	89
YQ15RS-D-TR-I	90
YQ15RS-D-TR-W	90
YQ15R-S-I	89
YQ15RS-TR-I	89
YQ15RS-TR-W	89
YQ15R-S-W	89
YQ20R-C-I	89
YQ20R-C-W	89
YQ20R-D-S-A	90

CATALOG NO.	PAGE
YQ20R-D-S-I	90
YQ20R-D-S-W	90
YQ20RH-HG-I	89
YQ20RH-HG-W	89
YQ20RS-D-TR-W	90
YQ115RH-I	88
YQ115RH-W	88
YQ115R-I	88
YQ115R-W	88
YQ120RH-I	88
YQ120RH-W	88
YQ120R-I	88
YQ120R-W	88
YQ3DS-IV	92
YQ3DS-W	92
YQ5226-W	93
YQ5625-W	92
YQ5634-IV	92
YQ5634-W	92
YQDS115-Q-AL	86
YQDS115-Q-I	86
YQDS115-Q-W	86
YQDS120-I	86
YQDS120-W	86
YQDS315-AL	86
YQDS315-Q-I	86
YQDS315-Q-W	86
YQDS415-AL	86
YQDS415-I	86
YQDS415-W	86
YQR30-3	91
YQR30-4	91
YQR50-4	91
YQR230-4	91
YQTS115-A	87
YQTS115-C-A	87
YQTS115-C-I	87
YQTS115-C-W	87
YQTS115-I	87
YQTS115-W	87
YQTS120-A	87
YQTS120-I	87
YQTS120-W	87
YQTS215-I	93
YQTS215-W	93
YQTS315-A	87
YQTS315-I	87
YQTS315-W	87
YQTS415-W	87
YQTS-R15-W	93

TERMS & CONDITIONS

[Effective January 1, 2014]

1. Return Policy

- a. Westgate Mfg is committed to providing 100% customer satisfaction. Returns are allowed for any reason on most items within 30 days of purchase with no restocking fees.
- b. Items must be returned in original packaging, including parts and manuals.
- c. All items must be returned in new condition, with an RGA form issued by Westgate Mfg. Due to the fluctuating price of copper, all purchases of wires and cable are final.
- d. Westgate Mfg strives to provide premium quality products that exceed UL standards and consumer expectations. All items are guaranteed for one full year in the case that items are found defective. (See Section 4 for more info on Westgate Mfg's Product Guarantee.)

2. Freight & Shipping Terms

- a. All shipments may be shipped to distributors stock, or any other location within the contiguous United States.
- b. Freight will be prepaid on each order or back order of \$1500.00 or more outside California, delivered to one single location within the contiguous United States (excluding Alaska and Hawaii).
- c. Customers may use their own carrier for shipping. Using Westgate "PP & Add" service will include handling charges.
- d. All items that are available in local stock and are ready to ship or will call the same day. However, Westgate Mfg shall not be held liable for any delay in shipping or handling of goods.

3. Purchasing Terms and Prices

- a. There is no minimum purchase requirement on orders. Items may be ordered by package quantity or in smaller quantities at no additional charge.
- b. Prices are subject to change without notice.
- c. Prices in Pricebook are for reference only and do not indicate maximum prices. Westgate reserves the right to charge any price based on its sole judgement.
- d. All prices round up to the nearest cent. Actual invoice prices may vary slightly.
- e. 30 day credit terms are available to purchasers with approved credit. A 1-½% finance charge per month may be assessed to accounts with past due balances.
- f. Purchaser will be held responsible for any returned check fees or legal fees due to failure of payment.
- g. Westgate Mfg reserves the right to refuse credit to anyone.

4. Product Guarantee

- a. Westgate brand products are warranted against defects in material and workmanship. In the event of any defects, Westgate Mfg promises only to repair or replace the defective products, free of charge. Westgate Mfg's liability is expressly limited to the cost of the initial product and any consequential damages arising out of the event of a defect are expressly excluded.
- b. Westgate Mfg guarantees its products against manufacturing defects for ONE FULL YEAR, provided that the product has been used in accordance with installation standards and the National Electrical Code.
- c. Some products have different guarantee policies. Westgate ballasts are guaranteed for THREE YEARS.

5. Product Changers

- a. The specifications and designs of our products may change in accordance with new codes and standards at any time without notice.

All purchases from Westgate are under this and other terms and conditions instructed by Westgate.

WESTGATE MFG INC. ALL RIGHTS RESERVED

Take a look at our Lighting Catalog.



Lighting
Catalog
#32



WESTGATE

The future is here...and it's quite bright...

WESTGATE MFG

ELECTRICAL CATALOG

WEATHERPROOF PRODUCTS

CODUIT BODIES

ELECTRICAL FITTINGS

WIRING DEVICES

CORDS

COMMUNICATION ENCLOSURES

WIRE & CABLE

Distributed by:



877.805.2252



877.809.2252

www.WESTGATEMFG.com

sales@westgatemfg.com

REPRODUCTION OF ALL OR ANY PART OF THIS CATALOG WITHOUT THE EXPRESSED WRITTEN CONSENT OR PERMISSION OF WESTGATE MFG., INC. IS STRICTLY PROHIBITED. WESTGATE RESERVES THE RIGHT TO MAKE ANY CHANGES AND IMPROVEMENTS TO THE DESIGN AND CONSTRUCTION OF PRODUCTS IN THIS CATALOG. SOME ITEMS AND SPECIFICATIONS MAY CHANGE.

COPYRIGHT 2014, WESTGATE MFG., INC. ALL RIGHTS RESERVED.

